


CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner not previously established

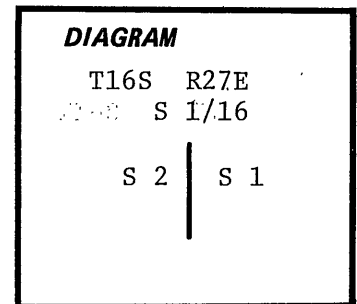

Description of corner evidence found:

None

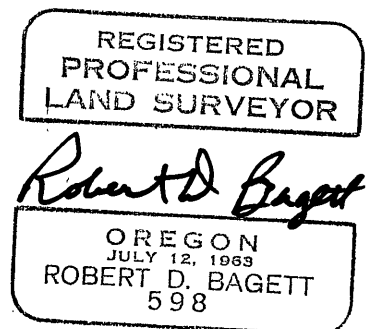

Monument Marked


See Record Map of Survey No. 897.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the corner point I set a 2½"x30" aluminum pipe with attached aluminum cap set 30" in the ground with a mound of stone to top of cap.
From which I scribe new BT's:

A Juniper 18" diam. bears N. 44° E., 54.1 feet marked S1/16 S1 BT.

A Juniper 16" diam. bears N. 43° W., 176.3 feet marked S1/16 S2 BT.

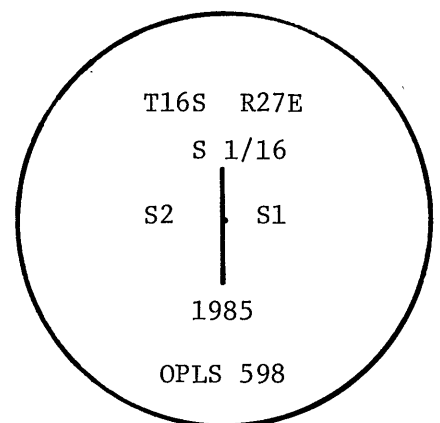

Corner set by: R. D. Baggett
Witness: T. R. Steele

Sept. 18, 1985

Nailed brass washer marked OPLS 598 to lower blaze of new BT's.
Painted 6" red band around new BT's above blaze and attached BT sign and attention sign to BT's. Set steel fence posts approx. 5 feet South from monument and attached appropriate signs as called for in my contract. Used magnetic compass with 18° E. var. and steel tape distance measured to a 40d nail driven in the side center at root crown of new BT's.

Office of.....Surveyor..... County of.....Grant.....
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the.....4..... day of.....Dec....., 19.85
.....Robert D. Baggett..... by
(COUNTY OFFICIAL) (DEPUTY)

Attest: by *Mary Moulton*
Form R6-7100-57 (9/71)

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276