


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established

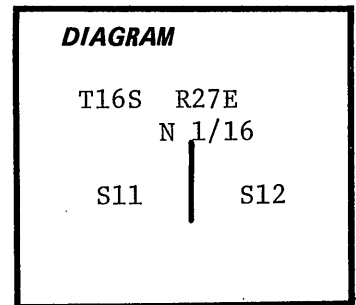

Description of corner evidence found:

None

See Record Map of Survey No. 897.

Description of monument and accessories | established to perpetuate the original location of this corner:

At corner point I set a 2½"x30" aluminum pipe with aluminum cap marked as shown, 30 inches in ground. From which I scribe new BT's:


A P. Pine 13 ins. diam. bears N. 22° E., 34.7 feet marked N 1/16 S12 BT

A Juniper 18 ins. diam. bears N. 81° W., 43.0 feet marked N1/16 S11 BT.

Corner set by: R. D. Bagett
Witness: T. R. Steele

Sept: 18, 1985


Monument Marked

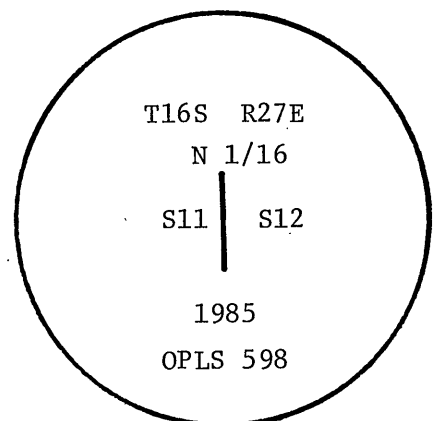

Nailed brass washer marked OPLS 598 to lower blaze of new BT's. Painted 6" red band around new BT's above blaze and attached BT sign and attention sign to BT's. Set steel fence posts approx. 5 feet North and East from monument and attached appropriate signs as called for in my contract. Used magnetic compass with 18° E. var. and steel tape distance measured to a 40d nail driven in the side center at root crown of new BT's.

Office of.....Surveyor..... County of.....Grant.....
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the.....4..... day of.....Dec....., 19..85
Robert D. Bagett by
(COUNTY OFFICIAL) (DEPUTY)

Attest: By Mary Mauleton
Form R6-7100-57 (9/71)



U.S. GOVERNMENT PRINTING OFFICE - 1983-793-270