


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established




Description of corner evidence found:

None

See Record Map of Survey No. 897.
Description of monument and accessories | established to perpetuate the original location of this corner:

At corner point set 2½x30 inch aluminum pipe with aluminum cap marked as shown, 27 inches in the ground Built mound of stone around cap, from which I scribe new BT's:

- A D. Fir, 14 ins. diam. bears N. 78° E., 43.4 feet marked CN 1/16 S12 BT
- A P. Pine, 9 ins. diam. bears N. 45° W., 20.2 feet marked CN 1/16 S12 BT.

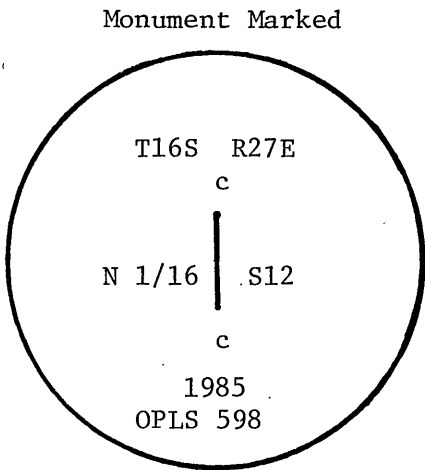

Corner set by: R. D. Bagett
Witness: T. R. Steele

Sept. 20, 1985

Nailed brass washer marked OPLS 598 to lower blaze of new BT's. Painted 6" red band around new BT's above blaze and attached BT sign and attention sign to BT's. Set steel fence posts approx. 5 feet North and West from monument and attached appropriate signs as called for in my contract. Used magnetic compass with 18° E. var. and steel tape distance measured to a 40d nail driven in the side center at root crown of new BT's.

Office of.....Surveyor..... County of.....Grant.....
State of.....Oregon....., I hereby certify that the within instrument was filed in this office for record on the.....4..... day of.....Dec....., 19.....85
Robert D. Bagett by.....
(COUNTY OFFICIAL) (DEPUTY)

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Attest: Mary Maulester
Form R6-7100-57 (9/71)