


CORNER RESTORATION

CORNER: W1/4 Cor. Sec. 16 Twp. 16 S. Range 27 E., W.M.

ORIGINAL SURVEY BY: Samuel W. Lackland

CONTRACT NUMBER: 415

CONTRACT DATE: August 19, 1881



Subsequent surveys:

- Gary Oviatt & Wayne Rogers in 1975 under special instructions dated August 25, 1975, Survey/Group No. 882

ORIGINAL DESCRIPTION: Set basalt Stone 15x12x7 ins. 10 ins. in ground for 1/4 Sec. Cor. Marked 1/4 on W. face. From which a Pine 7 ins. diam. bears S80°W, 10 lks dist. marked 1/4 S BT. A Fir 10 ins. diam. bears N76°E, 20 lks. dist. Marked 1/4 S BT.

- 1975: The 1/4 sec. cor. of secs. 16 and 17, monumented with the original basalt stone, 10 x 8 x 8 ins., loosely set 2 ins. in the ground, mkd. 1/4 on W. face, from which the remains of the original bearing trees:
 - A fir, 25 ins. diam., bears N. 76° E., 20 lks. dist., with scribe marks BT visible on opened blaze.
 - A root hole, bears S. 80° W., 10 lks. dist., with a down pine alongside, 10 ins. diam., with scribe marks 1/4 S BT visible on opened blaze.

At the corner point

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.

T 16 S R 27 E
1/4
S 17 | S 16
1976

from which a new bearing tree

A fir, 10 ins. diam., bears S. 69° W., 16 lks. dist., mkd. 1/4 S17 BT.

Deposit corner stone alongside iron post.


RESTORATION BY, STAMP AND DATE:

Michael C. Springer, PLS

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

DEC 3 2010

BY:

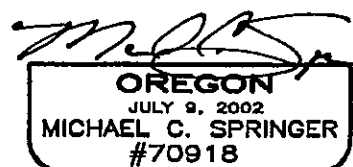

EXPIRES: 6/30/2012

December 2, 2010

Grant County Surveyor

EVIDENCE FOUND: None. No field visit was made for this Corner Restoration Report, it is prepared from record information. See Record Map of Survey No. 889 filed in the office of the Grant County Surveyor.