


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established of record.

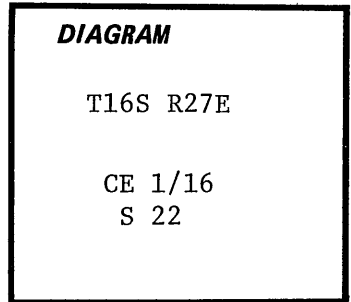

Description of corner evidence found:

None

See Record Map of Survey No. 897


Description of monument and accessories I established to perpetuate the original location of this corner:

At the corner point I set a 2½x30 inch aluminum pipe with an aluminum cap marked as shown, 28 inches in the ground. Surrounded pipe with mound stone, from which I scribe new BT's:

A Juniper 10 ins. diam. bears S. 47° E., 10.7 feet marked CE 1/16 S22 BT.

A Pine, 23 ins. diam. bears N. 26° E., 48.5 feet marked CE 1/16 S22 BT.

Monument Marked

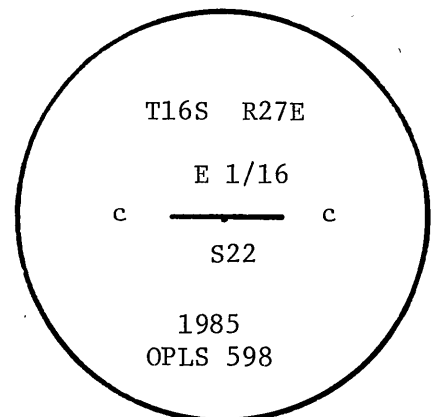


Corner set by: R. D. Bagett
Witnesses: J. L. Watson
T. R. Steele

Aug. 27, 1985

Nailed brass washer marked OPLS 598 to lower blaze of new BT's. Painted 6" red band around new BT's above blaze and attached BT sign and attention sign to BT's. Set steel fence posts approx. 5 feet West from monument and attached appropriate signs as called for in my contract. Used magnetic compass with 20° E. var. and steel tape measuring to a 40d nail driven in the side center at root crown of new BT's.

Office of.....Surveyor..... County of.....Grant.....
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the.....4..... day of.....Dec....., 19.85
Robert D. Bagett by
(COUNTY OFFICIAL) (DEPUTY)

Attest: by Mary Moulton
Form R6-7100-57 (9/71)



☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276