


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: Bamford Robb, Deputy Surveyor, under Contract No. 366, dated August 18, 1880.

Surveyor General Record States: Set stone 16x10x6 inches in a mound of stone for closing corner to sections 5 and 6.

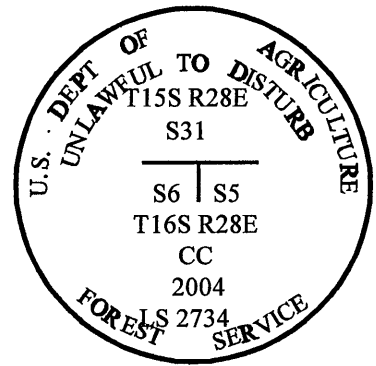

Description of corner evidence found:

No evidence of the original corner stone was found. This corner falls in the remnants of an old road bed.

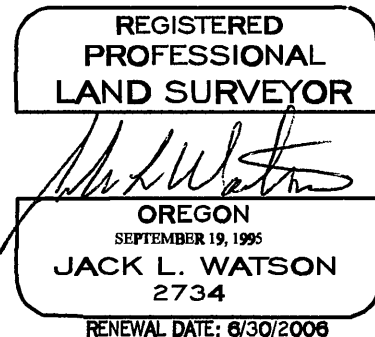

See Record Map of Survey No. 1712

Description of monument and accessories set at corner location:

At the corner position determined by single proportion I set a 2½"x30" aluminum pipe with attached ¾" aluminum cap, 10 inches in the ground, surrounded by a mound of stone 4 ft. base to top of cap. The cap is stamped as shown in the diagram.

From which:

A 8" P.Pine bears S19°E, 53.5 feet, marked T16SR28ES5CC BT.

A 8" P.Pine bears S31°W, 41.0 feet, marked T16SR28ES6CC BT.

A 5/8"x30" iron pin bears N31°E, 59.44 feet, with attached red plastic cap marked CORNERSTONE SURVEYING, INC.

A 5/8"x30" iron pin bears N20°W, 31.67 feet, with attached red plastic cap marked CORNERSTONE SURVEYING, INC.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination. Attached BT tag to BT's and painted a 6" red band at breast height on BT's.

Date: August 11, 2004

Office of Surveyor County of Grant
State of OREGON I hereby certify that the within instrument was filed in this office
for record on the 20 day of SEPT, 2004.
Bamford Robb by _____
(COUNTY OFFICIAL) (DEPUTY)