

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: Bamford Robb, Deputy Surveyor, under Contract No. 366, dated August 18, 1880.

Surveyor General Record States: Set basalt stone 14x10x6 in mound of stone for corner to sections 12,13,7,18.

From which:

A pine 48" dia. bears N25°E 72 lks dist.


A pine 16" dia. bears S85°E 110 lks dist.

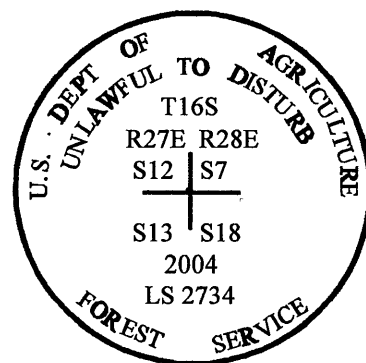

Description of corner evidence found:

Found basalt stone 14x11x5 ins. marked with 4 grooves on the south face and 2 grooves on the north face. Set upright in a mound of stone. From which: A 26" P.Pine, alive and well, bears S86°E, 72.6 ft., blaze is grown over, I did not open it.

A 40" P.Pine, dead and down, bears N21°E, 61 ft. to root hole with visible scribing.

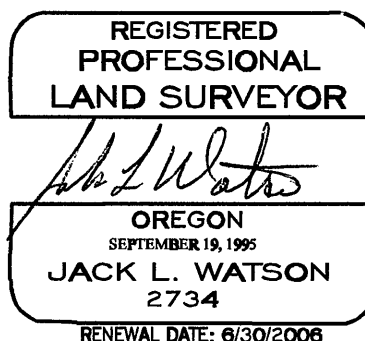

See Record Map of Survey No. 1712.

Description of monument and accessories set at corner location:

I accept the marked corner stone position for this corner. I set a 2½"x30" aluminum pipe with attached ¾" aluminum cap, 18 inches in the ground, surrounded by a mound of stone. Placed original marked stone south alongside pipe at base of stone mound. The cap is stamped as shown in the diagram.

From which:

A 8" P.Pine bears N3°E, 52.2 feet, marked T16SR28ES7 BT.

A 15" Juniper bears S57°E, 32.2 feet, marked T16SR28ES18 BT.

A 16" Juniper bears S77°W, 55.6 feet, marked T16SR27ES13 BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination. Attached BT tag and USFS Attention sign to BT's and painted a 6" red band at breast height on BT's.

Date: August 3, 2004

Office of Surveyor County of Grant
State of Oregon I hereby certify that the within instrument was filed in this office
for record on the 28 day of Sept, 2004.
Bamford Robb by _____
(COUNTY OFFICIAL) (DEPUTY)