


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: Bamford Robb, Deputy Surveyor, under Contract No. 366, dated August 18, 1880.

Surveyor General Record States: Set stone 24x16x14 in mound of stone for corner to sections 7,8,17,18.

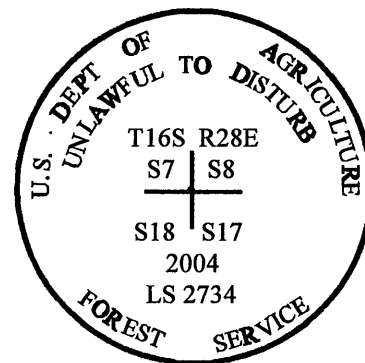

Description of corner evidence found:

No evidence of the original corner was found. The corner is in an area that has been logged.

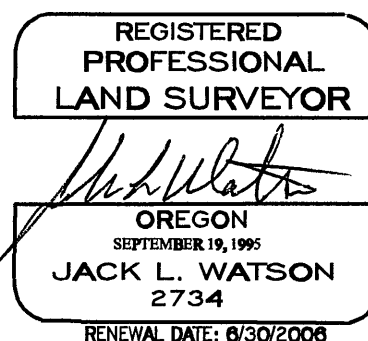

See Record Map of Survey No. 1712.

Description of monument and accessories set at corner location:

At the position determined by double proportion I set a 3" brass cap with a 3" brass stem grouted into bedrock. The cap is stamped as shown in the diagram.

From which:

A 6" Mahogany bears N33°W, 23.9 feet, marked X BT.

A 9" Fir bears N56°E, 26.8 feet, marked T16SR28ES8 BT.

A 24" P.Pine bears S67°E, 22.5 feet, marked T16SR28ES17 BT.

A 11" P.Pine bears S04°W, 13.6 feet, marked T16SR28ES18 BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination. Attached BT tag and USFS Attention sign to BT's and painted a 6" red band at breast height on BT's.

Date: August 27, 2004

Office of SURVEYOR County of GRANT
State of OREGON I hereby certify that the within instrument was filed in this office
for record on the 28 day of SEP, 2004.
Grant D. Brown by _____
(COUNTY OFFICIAL) (DEPUTY)