

CERTIFIED RECORD OF LAND CORNER MONUMENTATION
C1/4 Section 17, T16S, R28E, W.M.


History of original corner establishment:

A corner monument was set by Howard Perry, LS#1294, on Sept. 12, 1979. Set a 2½x30 in. iron pipe with brass cap.

From which:


A 11" P.Pine bears N20°W, 14.7 ft.

A 8" P.Pine bears S38°W, 8.8 ft.

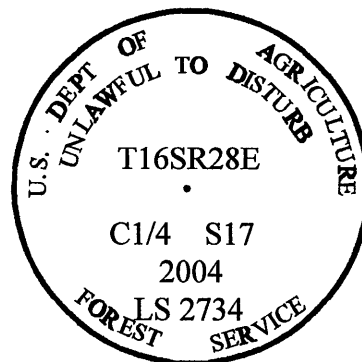

Description of corner evidence found:

I found a 2½" iron pipe and both BT references. This corner monument was established from unacceptable control and was not accepted. The monument was found S15°34'E, 9.03 ft. from the position recorded on Survey No. 587.

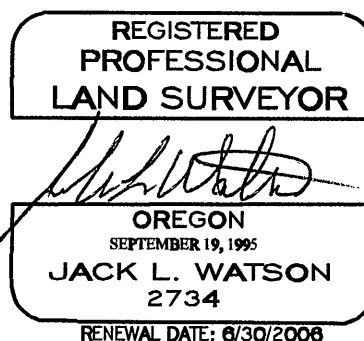

See Record Map of Survey No. 1712

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 2½" x30" aluminum pipe with an attached 3¼" aluminum cap, 18 inches in ground, built a mound of stone to top of cap. The cap is stamped as shown in the diagram.

From which:

A 5" P.Pine bears N61°E, 13.4 feet, marked X BT.

A 8" P.Pine bears S48°E, 11.6 feet, marked C1/4S17 BT.

A 15" P.Pine bears S63°W, 19.2 feet, marked C1/4S17 BT. This BT is also scribed on the south face, referencing the iron pipe set by Perry.

A 7" P.Pine bears N76°W, 38.9 feet, marked C1/4S17 BT.

The iron pipe set by Howard Perry bears S25°12'10"W, 24.03 ft., I stamped "AM" on this monument.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination. Attached BT tag and USFS Attention sign to BT's and painted a 6" red band at breast height on BT's.

Date: August 24, 2004

Office of SURVEYOR County of GRANT
State of OREGON I hereby certify that the within instrument was filed in this office
for record on the 28 day of SEPT, 2004.
Robert A. Dwyer by _____
(COUNTY OFFICIAL) (DEPUTY)