


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1880 by Bamford Robb, under General Land Office Joint Contract No. 366.

Surveyor General's records state:

Set stone 18x12x6 in mound of stone for $\frac{1}{4}$ sec. cor. from which a pine 28 in. dia. bears N 40° E 1ks dist.

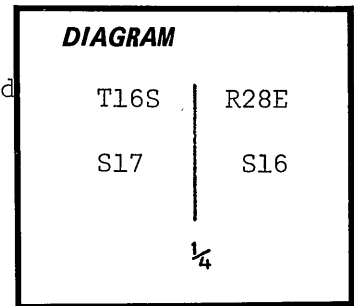

Note: No restoration appears in County records.

Description of corner evidence found:

At assumed corner location, I found 15x12x4 in stone lying on top of the ground, being record distance and having very faint markings on N face from which a 28 in. (now 34 in.) P pine bears N 50° E 74lks distance. Found scribing $\frac{1}{4}$ on W face. The original surveyors bearings have been consistently off by change in dec. 5-6 degrees and by the allowance of no dec. 19° +.

Description of monument and accessories I established to perpetuate the original location of this corner:

As evidence in the vicinity of corner agrees within limits of the GLO record, I accept the location of the 15x12x4 in. stone, and set a 30 in. long, by 2 in. dia. galv. iron pipe in ground, in a mound of stone, with 2 in. brass cap marked:


T16S R28E
 $\frac{1}{4}$
S17 S16
↓
1978
PLS 1067

New Bearing Trees:

P Pine 10 in. dia. bears S 63° 45'W (Dec. 19°) 65.65 feet. Scribed $\frac{1}{4}$ S17 B.T. Original bearing tree a P Pine 34 in. dia. bears N 50° E 74 lks dist. I buried the 15x12x4 stone alongside the iron pipe and I placed a brass washer marked 1067 and BT and Attn. signs on each bearing trees.

I hereby certify the above corner monument was re-established as herein described on June 1, 1978. Witness: Johnny D. Smith

Assistant

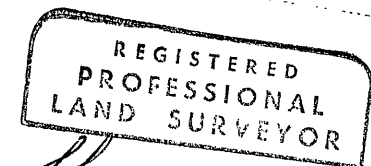

Sherman E. Anderson
OREGON
JULY 30, 1976
SHERMAN E. ANDERSON
1067

Office of *Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office
for record on the *21* day of *Sept*, 19*78*
Robert D. Bryant by _____
(COUNTY OFFICIAL) (DEPUTY)