


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION  
REFERENCES TO LINE TREE  
T16S, R28E, SECTION 17 & 18**

***History of original corner establishment:***

Original corner established by: Bamford Robb, Deputy  
Surveyor, under Contract No. 366, dated August 18, 1880.


Surveyor General Record States:

At 13.40 chains a pine tree 48 ins diameter.

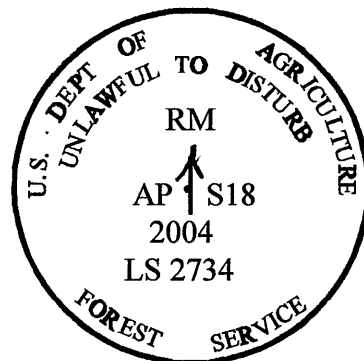

***Description of corner evidence found:***

Found 28" pine snag 8 ft. high with two distinct hack marks on  
the south side and two hack marks on the north side.

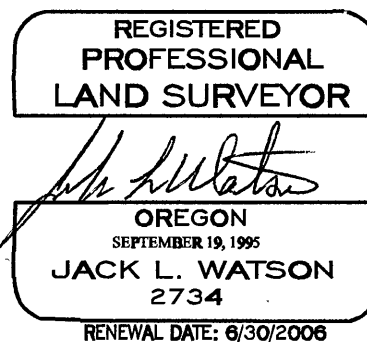

See Record Map of Survey No. 1712

***Description of monument and accessories set at corner location:***

I accept the center point of the pine snag for the original line tree position. This is now an angle  
point in the section line.

From which:

A 7" P.Pine bears N75°E, 13.6 feet, marked AP S17 BT.

A 13" P.Pine bears N15°E, 21.2 feet, marked AP S17 BT.

A 2½"x30" aluminum pipe with an attached ¾" alum. cap, set 14" in the ground, bears  
S00°42'E, 5.00 ft. marked as shown in the diagram.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's  
and magnetic compass, with 18° E. declination. Attached BT tag and USFS Attention sign to  
BT's and painted a 6" red band at breast height on BT's.

Date: July 30, 2004

Office of SURVEYOR County of GRANT  
State of OREGON I hereby certify that the within instrument was filed in this office  
for record on the 28 day of SEPT, 2004.  
Grant & Bryant by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)

**AP M-5A**