

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: Bamford Robb, Deputy Surveyor, under Contract No. 366, dated August 18, 1880.

Surveyor General Record States: Set basalt stone 22x12x10 in mound of stone for corner to sections 24,13,18,19.

From which:


A pine 24" dia. bears S10°W 11 lks dist.

A pine 48" dia. bears S85°E 81 lks dist.

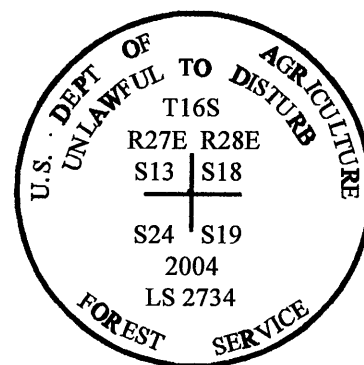

Description of corner evidence found:

Found basalt stone 15x11x7 ins. marked with 3 grooves on the south face and 3 grooves on the north face. Set upright in a mound of stone. From which: A 26" P.Pine bears S10°W, 7.2 ft., tree is alive but has been badly scared and burned, no scribing is visible. A 38" P.Pine, dead and down, bears S85°E, 53.5 ft. with visible scribing.

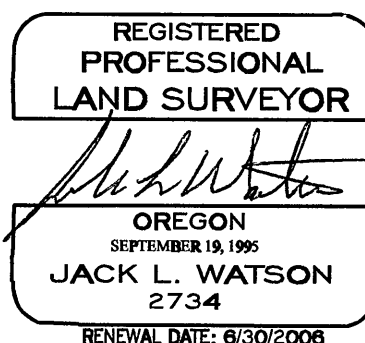

See Record Map of Survey No. 1712.

Description of monument and accessories set at corner location:

I accept the marked corner stone position for this corner. I set a 2½"x30" aluminum pipe with attached ¾" aluminum cap, 16 inches in the ground, surrounded by a mound of stone. Buried original marked stone west alongside pipe. The cap is stamped as shown in the diagram.

From which:

A 5" Fir bears N37°E, 17.6 feet, marked X BT.

A 10" P.Pine bears S17°E, 14.5 feet, marked T16SR28ES19 BT.

A 15" P.Pine bears S76°W, 14.8 feet, marked T16SR27ES24 BT.

A 10" Fir bears N15°W, 27.6 feet, marked T16SR27ES13 BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination. Attached BT tag and USFS Attention sign to BT's and painted a 6" red band at breast height on BT's.

Date: July 30, 2004

Office of SURVEYOR County of GRANT
State of OREGON I hereby certify that the within instrument was filed in this office
for record on the 28 day of SEP, 2004.
Robert D. Boyd by _____
(COUNTY OFFICIAL) (DEPUTY)