

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:



Original corner established by: Bamford Robb, Deputy Surveyor, under Contract No. 366, dated August 18, 1880.
Surveyor General Record States: Set stone 20x18x6 in mound of stone for 1/4 section corner. From which a pine 24" dia. bears N45°E 27 lks dist.

Corner restoration by Sherman E. Anderson, LS#1067, June 7, 1978.
Found 20x18x6 in. basalt stone lying on the ground no marks, from which a dead and down pine bears N45°E 27 lks. Set 2" diam. iron pipe with 2" brass cap, from which:

A P.Pine 16 in. diam. bears N8°E, 68 feet, scribed 1/4S17BT.
A P.Pine 7 in. diam. bears S40°W, 25.2 feet scribed 1/4S20BT. (This BT was not blazed or scribed).

Description of corner evidence found:

Found 2" iron pipe set by Sherman Anderson and a stone 20x18x6 with no marks viable. A 12" dead and down pine is N45°E, 17.8 ft. with a 1978 BT tag in the stump. This tree fell toward the corner monument, I examined the underside of the log for the original scibing, none was found. The tree bark was examined for ax marks and was used to verify the tree diameter. The tree has been scared and partially overgrown from the root crown to a height of 7 or 8 feet. I do not believe this is the original BT. The tree diameter was 12" when it died, not 24" as called for, and no evidence was found of ax marks or scribing. There is no evidence of the original corner stone. I therefore do not accept the position of the iron pipe monument for the original corner position.

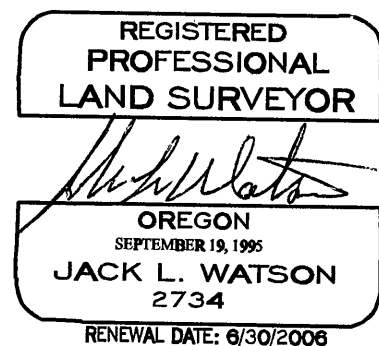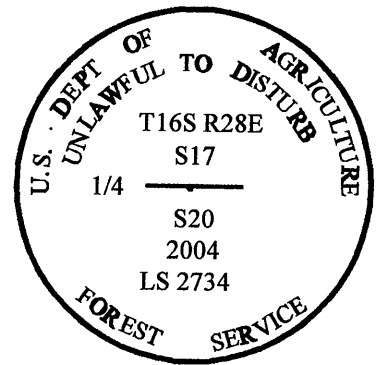

See Record Map of Survey No. 1712.

Description of monument and accessories set at corner location:

At the corner position determined by single proportion I set a 2½"x30" aluminum pipe with attached 3¼" aluminum cap, 26 inches in the ground. The cap is stamped as shown in the diagram.

From which:

A 6" P.Pine bears N14°E, 40.3 feet, marked X BT.

A 11" P.Pine bears S44°E, 19.9 feet, marked 1/4S20 BT.

A 6" P.Pine bears S87°E, 33.8 feet, marked X BT.

A 17" Fir bears N47°W, 24.8 feet, marked 1/4S17 BT.

The iron pipe set by Anderson bears S25°00'19"W, 63.06 ft., I stamped "AM" on this monument.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination. Attached BT tag and USFS Attention sign to BT's and painted a 6" red band at breast height on BT's.

Date: August 3, 2004

Office of Surveyor County of Grant
State of Oregon I hereby certify that the within instrument was filed in this office
for record on the 28 day of Sept, 2004.
Robert D. Bayne by _____
(COUNTY OFFICIAL) (DEPUTY)