


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION
REFERENCES TO LINE TREE
T16S, R28E, SECTION 19 & 20**

History of original corner establishment:

Original corner established by: Bamford Robb, Deputy
Surveyor, under Contract No. 366, dated August 18, 1880.


Surveyor General Record States:

At 28.00 chains a pine tree 36 ins diameter.

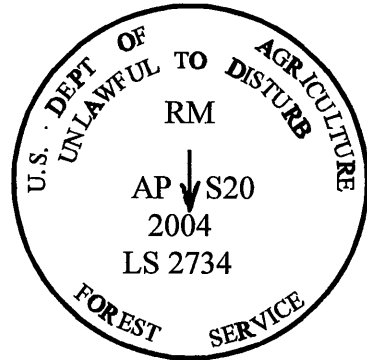

Description of corner evidence found:

Found 29" P.Pine with two distinct hack marks on the north side
at breast height. The tree is alive and well.

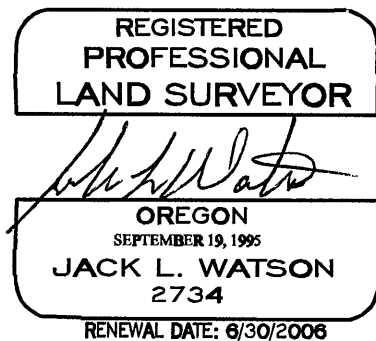

See Record Map of Survey No. 1712

Description of monument and accessories set at corner location:

I accept the center point of the pine tree for the original line tree position. This is now an angle
point in the section line.

From which:

A 13" P.Pine bears N32°E, 57.4 feet, marked AP S20 BT.

A 9" P.Pine bears N74°W, 52.4 feet, marked AP S19 BT.

A 2½"x30" aluminum pipe with an attached ¾" alum. cap bears N00°04'W, 10.00 ft. marked as
shown in the diagram.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's
and magnetic compass, with 18° E. declination. Attached BT tag and USFS Attention sign to
BT's and painted a 6" red band at breast height on BT's.

Date: July 30, 2004

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 28 day of SEPT, 2004.
Grant D. Bryant by _____
(COUNTY OFFICIAL) (DEPUTY)

AP P-5A