

CERTIFIED RECORD OF LAND CORNER MONUMENTATION
CW1/16 Section 20, T16S, R28E, W.M.


History of original corner establishment:

A corner monument was set by Howard Perry, LS#1294, on August 31, 1979. Set a 2½x30 in. iron pipe with brass cap.

From which:


A 30" P.Pine bears N23°E, 77.6 ft.

A 10" P.Pine bears N62°W, 21.3 ft.

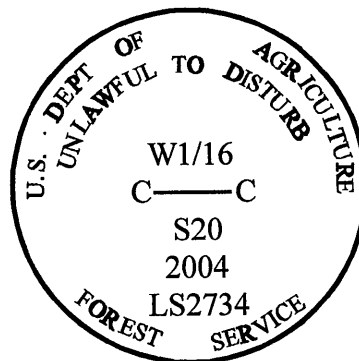

Description of corner evidence found:

I found a 2½" iron pipe and both BT references. This corner monument was established from unacceptable control and was not accepted. See survey narrative for complete explanation.

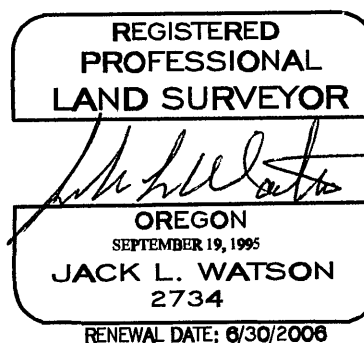

See Record Map of Survey No. 1712

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 2½" x30" aluminum pipe with an attached ¾" aluminum cap, 36 inches in ground. The cap is stamped as shown in the diagram.

From which:

A 5/8"x30" iron pin bears N57°13'E, 20.00 feet, with attached 2" alum. cap marked RM1 CORNERSTONE SURVEYING, INC.

A 5/8"x30" iron pin bears S40°26'E, 20.00 feet, with attached 2" alum. cap marked RM2 CORNERSTONE SURVEYING, INC.

The iron pipe set by Howard Perry bears S89°14'03"W, 6.84 ft., I stamped "AM" on this monument.

I used true bearings based on Survey No. 1712 and EDM to tie references.

Date: August 3, 2004

Office of SURVEYOR County of GRANT
State of OREGON I hereby certify that the within instrument was filed in this office
for record on the 20 day of SEPT, 2004.
Samuel D. Broughton by _____
(COUNTY OFFICIAL) (DEPUTY)