

CERTIFIED RECORD OF LAND CORNER MONUMENTATION
C1/4 Section 20, T16S, R28E, W.M.

History of original corner establishment:

A corner monument was set by Howard Perry, LS#1294, on Sept. 10, 1979. Set a 2½x30 in. iron pipe with brass cap.

From which:


A 9" White Fir bears S08°E, 15.3 ft.

A 8" White Fir bears N42°E, 5.3 ft.



Description of corner evidence found:

I found a 2½" iron pipe and both BT references. This corner monument was established from unacceptable control and was not accepted. See survey narrative for complete explanation.

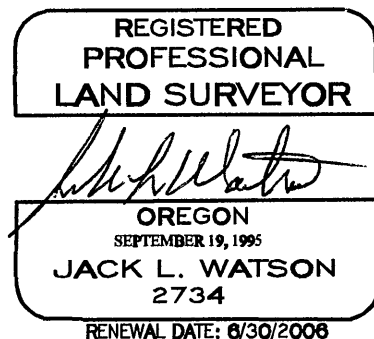

See Record Map of Survey No. 1712

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 2½" x30" aluminum pipe with an attached 3¼" aluminum cap, 22 inches in ground, built a mound of stone to top of cap. The cap is stamped as shown in the diagram.

From which:

A 9" Fir bears S86°E, 33.5 feet, marked C1/4S20 BT.

A 12" Fir bears S33°E, 22.1 feet, marked C1/4S20 BT.

A 11" Fir bears N82°W, 14.5 feet, marked C1/4S20 BT.

A 15" Fir bears N44°W, 13.4 feet, marked C1/4S20 BT.

The iron pipe set by Howard Perry bears N86°20'36"W, 13.23 ft., I stamped "AM" on this monument.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination. Attached BT tag and USFS Attention sign to BT's and painted a 6" red band at breast height on BT's.

Date: August 24, 2004

Office of SURVEYOR County of GRANT
State of OREGON I hereby certify that the within instrument was filed in this office
for record on the 28 day of SEPT, 2004.
James D. Bayett by _____
(COUNTY OFFICIAL) (DEPUTY)