


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Bamford Robb, under joint contract #357, dated July 2, 1880.

Surveyor General's records state: Set 12"x12"x4" stone in mound of stone from which;
a pine 24" in diameter bears N 15° E 17 links distance

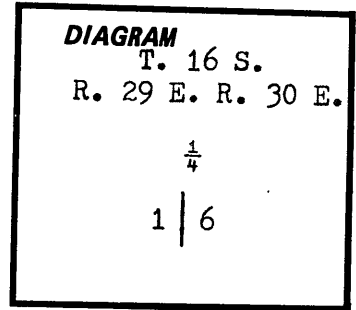

Description of corner evidence found:

Found 12"x12"x4" stone with 1/4 on west face in small mound of stone.

Found a ponderosa pine 25" in diameter N 15° E 17 links distance to side and center, scribed "1/4S".

Corner is 5 links distance west of north south fence.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 2 1/2"x30" aluminum pipe with 3 1/4" aluminum cap 26" in ground in mound of stone. Buried original stone alongside of new monument. Cap marked;

Bearing trees

a fir 7" in diameter bears N 46° W 7.9 feet distance, scribed "1/4S1" in upper blaze and "BT" and brass tag stamped RLS 1664 in lower blaze.

a tamarack 7" in diameter bears S 74° E 28.7 feet distance, scribed "1/4S6" in upper blaze and "BT" and brass tag stamped RLS 1664 in lower blaze.


Compass declination 18° East

Note

I set a steel fence post with USFS Attention sign at corner, placed USFS bearing tree signs on all bearing trees, and painted red band on smooth bark at breast height on all bearing trees.

I hereby certify the above corner location was perpetuated as herein described on June 18, 1981.

Terry Butler Terry Butler, Witness

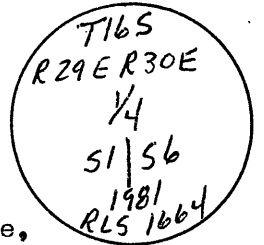

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Carl E. Sundet

OREGON
JULY 14, 1978
CARL E. SUNDET
1664

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 23 day of Oct, 1981
Robert D. Baggett by _____
 (COUNTY OFFICIAL) (DEPUTY)