


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Corner originally established by Bamford Robb, under joint contract #357, dated July 2, 1880.

Surveyor General's records state: Set post from which;  
a pine 10" in diameter bears N 05° E 275 links distance  
a pine 8" in diameter bears N 05° W 278 links distance

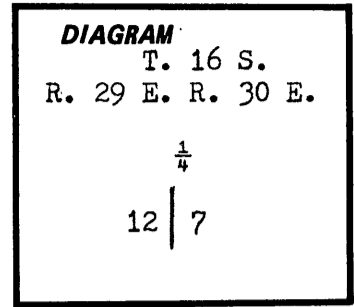

**Description of corner evidence found:**

Found no evidence of original post or original bearing trees.

**Description of monument and accessories established to perpetuate the original location of this corner:**


Set by single proportionate measurement, a 2 1/2" x 30" aluminum pipe with a 3/4" aluminum cap 24" in ground. Cap marked;

**Bearing trees**

a ponderosa pine 11" in diameter bears N 38° W 241.2 feet distance, scribed "1/4 S12" in upper blaze and "BT" and brass tag stamped RLS 1664 in lower blaze.

a lodgepole pine 11" in diameter bears S 71° E 95.6 feet distance, scribed "1/4 S7" in upper blaze and "BT" and brass tag stamped RLS 1664 in lower blaze.

Compass declination 18° East

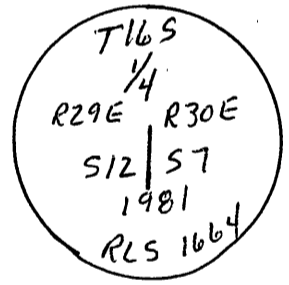

**Note**

I set a steel fence post at corner with USFS Attention sign, placed USFS bearing tree signs on all bearing trees, and painted red band on smooth bark at breast height on all bearing trees.

I hereby certify the above corner location was perpetuated as herein described on July 16, 1981.

Terry Butler Terry Butler, Witness

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

Carl E. Sundet  
OREGON  
JULY 14, 1978  
CARL E. SUNDET  
1664

Office of Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 23 day of Sept, 1981  
Robert H. Supt by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)