


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by S. W. Lackland, under joint contract #357, dated July 2, 1880. Surveyors General's records state; Set post from which; a pine 12" in diameter bears S 10° E 65 links distance a pine 14" in diameter bears N 76° E 30 links distance

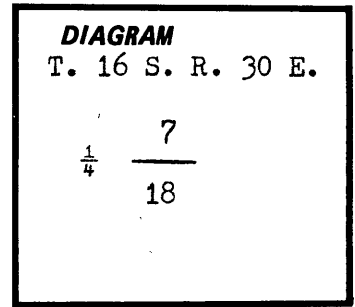

Description of corner evidence found:

Found no evidence of original post or northeast bearing tree.
Found a ponderosa pine 23" in diameter with visible scribing "S B" S 10° E 65 links distance

Description of monument and accessories I established to perpetuate the original location of this corner:

At record bearing and distance from southeast bearing tree, I set a 2½"x30" aluminum pipe with ¾" aluminum cap, 25" in ground in mound of stone. Cap marked:

Bearing trees

a ponderosa pine 7" in diameter bears N 79° W 15.9 feet distance, scribed "¼S7" in upper blaze and "BT" and brass tag stamped RLS 1664 in lower blaze.

a fir 9" in diameter bears S 29° E 18.5 feet distance, scribed "¼S18" in upper blaze and "BT" and brass tag stamped RLS 1664 in lower blaze.


Compass declination 18° East

Note

I set a steel fence post with USFS Attention sign at corner, placed USFS bearing tree signs on all bearing trees, and painted red band on smooth bark at breast height on all bearing trees.

I hereby certify the above corner location was perpetuated as herein described on June 20, 1981.

Terry Butler Terry Butler, Witness

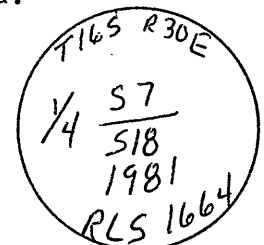

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Carl E. Sundet

OREGON
JULY 14, 1978
CARL E. SUNDET
1664

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 23 day of Oct, 1981
Robert H. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)