


CERTIFIED RECORD OF LAND CORNER MONUMENTATION



History of original corner establishment:

The original corner was set by S. W. Lackland in 1870 under GLO Joint Contract #357 dated July 2, 1880 and approved March 23, 1881. Set post from which;
A Pine 16" diameter bears S47°W 50 links distance.
A Pine 36" diameter bears S60°E 77 links distance.
A Pine 30" diameter bears N05°E 43 links distance.
A Pine 8" diameter bears N07°W 47 links distance.

The corner was remonumented by Carl E. Sundet, LS 1664 and filed October 23, 1981. See Grant County Survey #702.

Description of corner evidence found:

Found no evidence of original post (By Sundet).
Found 36" Ponderosa Pine stump with burnt face with visible scribing, S60E 77 links. (By Sundet).
Found 12" burnt log with BT face but unable to find its origin. (By Sundet).


Found a 2 ½"X30" aluminum pipe with 3 ¼" aluminum cap 26" in ground in a mound of stone in good condition.
Found 15" Ponderosa Pine bears N64°E 29.8' face grown over.
Found 10" Ponderosa Pine bears S64°E 32.2' face grown over.
SW BT is down.
NW BT is down.

Description of monument and accessories I establish to perpetuate the original location of this corner:

A 5/8"X30" rebar driven flush bears S40°30'W 29.79' with a red plastic cap scribed CJ STOUT OPLS 2632.
A 5/8"X30" rebar driven flush bears N52°30'W 22.59' with a red plastic cap scribed CJ STOUT OPLS 2632.

A Warren-Knight staff compass with 19° East declination was used for bearings and a steel chain was used to pull distances.

Witness: Shawn Parsons
7/17/03

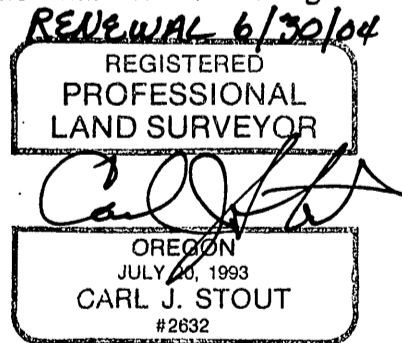

Office of County Surveyor, County of Grant, State of Oregon,
I hereby certify that the within instrument was filed in this office
For record on the 14 day of Nov, 2003.

Robert D. Bryant by _____
(COUNTY OFFICIAL) (DEPUTY)