


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

No original history.

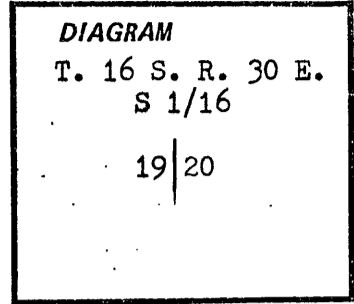

Description of corner evidence found:

None set

Description of monument and accessories I established to perpetuate the original location of this corner: Set corner by single proportionate measurement. At corner location, I set a 2½" x 30" aluminum pipe with a ¾" aluminum cap 26" in ground. Marked;

Bearing trees

a ponderosa pine, 22" in diameter, bears N 13° W, 194.0 ft., scribed "S 1/16 S19" in upper blaze and "BT" and brass washer stamped RLS 1664 in lower blaze.

a ponderosa pine, 19" in diameter, bears N 73° E, 163.7 ft., scribed "S 1/16 S20" in upper blaze and "BT" and brass washer stamped RLS 1664 in lower blaze.

Compass declination 19° East

T16S R30E  
S1/16  
S19/S20  
1980  
RLS 1664

I certify the above corner location was perpetuated as herein described in January 1981.

Terry Butler Terry Butler, Witness

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Carl E. Sundet*

OREGON  
JULY 14, 1978  
CARL E. SUNDET  
1664

Office of... Surveyor ... County of... Grant ...  
 State of... Oregon ... I hereby certify that the within instrument was filed in this office  
 for record on the... 13 day of... Feb ... , 1981 ...  
 by Robert D. Deppa (COUNTY OFFICIAL) (DEPUTY)