


CERTIFIED RECORD OF LAND CORNER MONUMENTATION.

History of original corner establishment:

No original history.

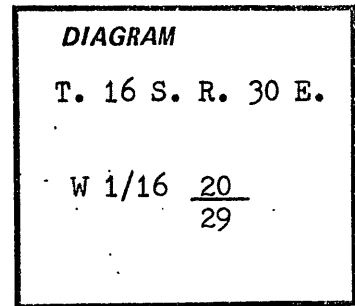

Description of corner evidence found:

None set.

Description of monument and accessories I established to perpetuate the original location of this corner: Set corner by single proportionate measurement. At corner location, I set a 2½" x 30" aluminum pipe with a ¾" aluminum cap 26" in ground, marked;

Bearing trees

a ponderosa pine, 13" in diameter, bears N 41° W, 138.8 ft., scribed "W 1/16 S20" in upper blaze and "BT" and brass washer stamped RLS 1664 in lower blaze.

a ponderosa pine, 14" in diameter, bears N 68° E, 315.0 ft., scribed "X" in upper blaze and "BT" and brass washer stamped RLS 1664 in lower blaze. Compass declination 19° East.



I certify the above corner location was perpetuated as herein described in January 1981.

Terry Butler Terry Butler, Witness

REGISTERED PROFESSIONAL LAND SURVEYOR

Carl E. Sundet

OREGON
JULY 14, 1978
CARL E. SUNDET
1664

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 13 day of Feb, 1981
Robert D. Baggett by
(COUNTY OFFICIAL) (DEPUTY)