


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by S. W. Lackland under joint contract number 357 dated July 2, 1880.

The government field notes state:

40 00 Set post for 1/4 Sec cor. from which
A pine 12 in dia bears N45°W 14 lks dist
" " 10 " " " N10°E 12 " "

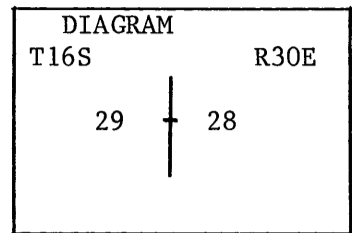

Description of corner evidence found:

I did not find the original corner post. I found a mound of stones on record distance. From the corner point:

A 20" DBH PP bears N20°E 8.4 Ft. scribed S.
A 17" DBH PP bears N57°W 10.2 Ft. scribed 1/4S.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 30" long 2-1/2" dia. aluminum pipe with 3-1/4" cap marked:
20" in ground & erected a mound of stones around it.
from which I scribe NEW BEARING TREE:

A 14" DBH PP bears S20°W 29.1 Ft.,
scribed 1/4 S29 BT.

U.S. DEPT.
OF AGRICULTURE
UNLAWFUL TO DISTURB
T16S R30E
1/4
S29 | S28
OPLS 1805
1979
CADASTRAL SURVEY
FOREST SERVICE

I painted faces & bands around BT's red & attached BT & Attention tags & nailed a brass washer to the new BT blaze marked PLS 1805.
I drove a 6 Ft. long steel fence post 2.0 Ft. in ground 6 Ft. N of corner & attached an attention tag to it.
I used a steel tape & magnetic staff compass with 20° East variation, measuring to the center of the new BT.
This corner was set November 20, 1979
Witness: F.R. Palmer, S. Anderson & L.R. Nevill

Office of County Surveyor County of Grant
State of Oregon , I hereby certify that the within instrument was filed
in this office for record on the day of , 19
 by
(COUNTY OFFICIAL) (DEPUTY)

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 13, 1979
F. E. CALKINS
1805