

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner has not been previously set.

DIAGRAM
T16S R30E

W1/16
C-----C
S28

1986
PLS 699

Description of corner evidence found:
Corner is being set by this survey.

Description of monument and accessories I established to perpetuate the original location of this corner:


Set a 2"x30" aluminum pipe with a 3 1/4" aluminum cap, marked as shown in the diagram, 26" in the ground, at a point as determined by the procedures set forth in the MANUAL OF INSTRUCTIONS FOR THE SURVEY OF PUBLIC LANDS for the subdivision of sections. Built a mound of rock & earth to be 24" in diameter by 4" high around the monument, from which new BTs are:

12" Ponderosa pine bears S19° 30'E, 10.3 feet scribed CW1/16 S28 BT


13" Ponderosa pine bears N13° 15'E, 19.4 feet scribed CW1/16 S28 BT

Attached BT and Land Survey Monument signs to and painted a red band around each BT. Bearings were turned from the control traverse with a theodolite, basis of bearing being a solar observation, to stamped brass washers nailed in the scribed red-painted blazes. Distances were measured from a 60d spike, with an aluminum washer stamped PLS 699, which was driven into the side of each BT approximately one foot above the ground. Set steel fence posts 5 feet N and 5 feet E of the corner on the National Forest property lines. Attached Forest Boundary signs to each post and a Land Survey Monument sign to the N post.

I, Leland L. Myers, P.O. Box 98, Sumpter, OR 97877, do hereby certify that on June 18, 1986, I established the corner as herein described.

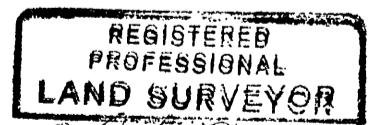

Leland L. Myers



FILED

IN THE OFFICE OF THE Grant COUNTY SURVEYOR

THIS 30 DAY OF Sept, 1986

Robert D. Buxton
Grant County Surveyor