


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1880 by S. W. Lackland under General Land Office Contract No. 357
Surveyor General Record states:
Set post for 1/4 section corner from which:
A pine 16 ins. diam. bears S. 65° E. 45 lks.
A pine 20 ins. diam. bears S. 80° W., 110 lks.

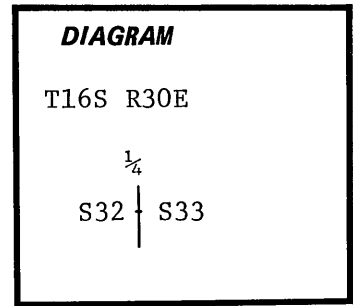

Description of corner evidence found:

Found original BT's:

from corner position:
A pine 24" diam. bears S. 36° E. 29.7 feet marked "BT" in blaze opened by USFS
A pine stump 14" diam. bears S. 74° W., 72.6 feet marked "BT" measured to face of original BT's. No evidence of original post was found.

See Record Map of Survey No. 881

Description of monument and accessories I established to perpetuate the original location of this corner:

At record distance from the two original BT's I set a 2 1/2"x30" aluminum pipe with aluminum cap buried 25" in the ground marked as shown.
From which:

I scribe new BT

A pine 13" diam. bears N. 76° W., 17.7 feet marked
T16SR30E 1/4 S32BT

MONUMENT MARKED


REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Corner set by: R.D. Bagett
Witnesses : J.L. Watson
T.R. Steele

July 2, 1985

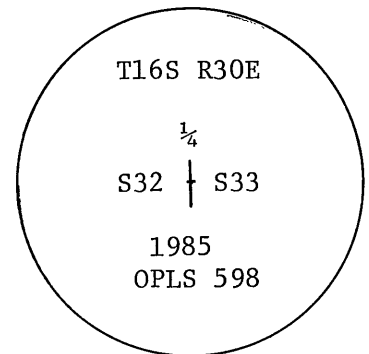

Nailed brass washer marked OPLS 598 to lower blaze of new BT's. Painted 6" red band around new BT's above blaze and attached BT sign and attention sign to BT's. Set steel fence posts approx. 5 feet North & South from monument, and attached appropriate signs as called for in my contract. Used magnetic compass with 20° E. var. and steel tape measuring to a 40d nail driven in side center at root crown of BT.

Office of.....Surveyor..... County of.....Grant.....
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the 14 day of Sept, 1985
Robert D. Bagett by
(COUNTY OFFICIAL) (DEPUTY)