


CERTIFIED RECORD OF LAND CORNER MONUMENTATION.

History of original corner establishment:

Corner not established in Original Survey

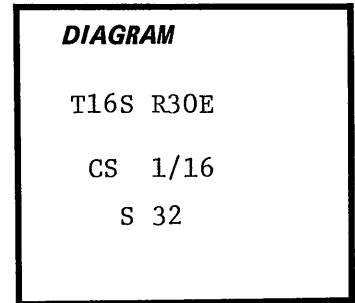

Description of corner evidence found:

NONE

See Record Map of Survey No. 881

Description of monument and accessories I established to perpetuate the original location of this corner:

At corner point I set a 2 1/2 x 30 inch aluminum pipe with aluminum cap marked as shown, 24 inches in the ground.

From which:

A pine, 10 ins. diam. bears S. 68° E., 9.8 feet, marked CS 1/16 S32 BT

A pine, 12 ins. diam. bears S. 84° W., 17.5 feet, marked CS 1/16 S32 BT.

MONUMENT MARKED


REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Corner set by: R. D. Bagett
Witnesses : J. L. Watson
T. R. Steele

July 17, 1985

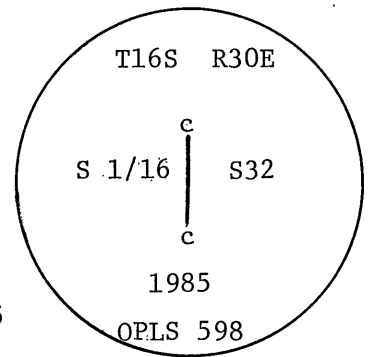

Nailed brass washer marked OPLS 598 to lower blaze of new BT's. Painted 6" red band around new BT's above blaze and attached BT sign and attention sign to BT's. Set steel fence posts approx. 5 feet North & East from monument and attached appropriate signs as called for in my contract. Used magnetic compass with 20° E. var. and steel tape measuring to a 40d nail driven in side center at root crown of BT's.

Office of.....Surveyor..... County of.....Grant.....
 State of.....Oregon....., I hereby certify that the within instrument was filed in this office
 for record on the..14... day of.....Sept....., 19..85
Robert D. Bagett by
 (COUNTY OFFICIAL) (DEPUTY)