

CORNER RESTORATION


S.W. cor.
CORNER Sec. 8 TWP 16 S. RANGE 31 E., W.M.

ORIGINAL SURVEY BY: S. W. Lackland

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

This corner was subsequently set by Vernon Glaze, past County Surveyor, in March 1917, the record of which is filed in Book 1917-3, Grant County Surveyors Records.

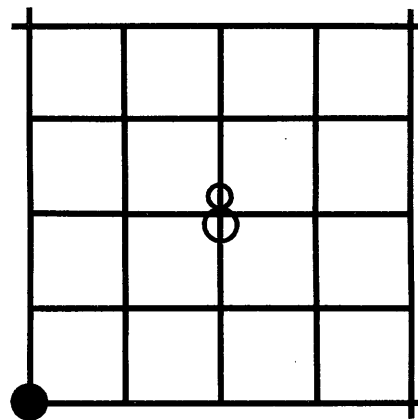

ORIGINAL DESCRIPTION: G.L.O. Record: Set post for cor. to Secs. 7-8-17 & 18 with pits and mounds as per instructions.

Glaze's Record: South

To sec. cor. common to Secs. 7-8-17-18. Set rock volcanic ash 14x4x12 marked 4 notches South 5 East thence
100.00 Silvies River flows Southeast
200.00 Silvies River flows Southeast

**RECEIVED AND
FILED**

NOV 2 1983

RESTORATION BY, STAMP AND DATE:

R. D. Baggett
J. L. Watson

Oct. 13, 1983

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Baggett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

OFFICE OF COUNTY SURVEYOR

Robert D. Baggett
Attest: *Carol Wright*
Co. Clerk.

Grant County Surveyor.

EVIDENCE FOUND: I found the volcanic ash rock 12x9x4 inches marked with 4 notches on one edge and 3 remaining notches on other edge which was set by Glaze at the corner of fences running North and West. Stone is beginning to weather. I accept this rock for the position of the Section corner. The original post has long since deteriorated, and I find no remains of it. This rock has long been accepted for the section corner by the local land owners.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

In place of the rock set by Glaze, I set a 1½"x30" galvanized iron pipe 30 inches in the ground with brass cap marked as shown, from which I drive four 5/8"x30" iron pins with attached yellow plastic cap marked "B-G-A Survey Marker", flush with the surface of the ground for reference monuments as follows:
Bearings based on Solar observation.

Pin 1 bears N. 1° 57' E. 50.00 ft. in N-S fenceline
Pin 2 bears N. 86° 36' E., 20.00 ft.
Pin 3 bears S. 1° 57' W., 15.00 ft.
Pin 4 bears S. 86° 36' W., 20.00 ft. in fenceline

I buried Glaze's corner stone North and alongside the iron pipe. This corner is 1 ft. West of a fence corner of fences running N. & W. and is 43 ft. N. of the N. bank of the present channel of the Silvies River. The channel of the Silvies River is constantly changing course in this area.

MONUMENT MARKED

