


CORNER RESTORATION

SW cor.
CORNER Sec. 35 TWP 16 S. RANGE 31 E., W.M.

ORIGINAL SURVEY BY: Bamford Robb

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

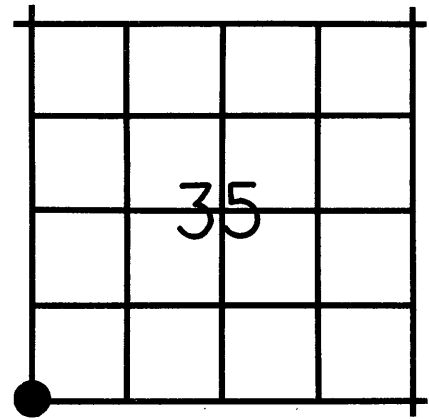

ORIGINAL DESCRIPTION:

Set stone 18x12x6 for cor. to Secs. 2, 3, 34 and 35,
with pits and mound as per instructions

**RECEIVED AND
FILED**

AUG 11 1983

OFFICE OF COUNTY SURVEYOR

Robert D. Baggett
Attest: *Lammie Laurance*

RESTORATION BY, STAMP AND DATE:

R. D. Baggett
G. T. Blackman
J. L. Watson

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Baggett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

July 28, 1983

Grant County Surveyor

EVIDENCE FOUND:

I found an unmarked stone 12"x14"x5" buried 4" below ground surface and alongside a steel pipe casing 5" diam. and 2 ft. long set vertically in the ground. This casing is filled with concrete and has a 1" diam. brass rod in the center top of the concrete. The brass rod was punchmarked. This monument has long been accepted as the section corner although I can find no record of any surveyor having set it. The monument may have been set to perpetuate the corner position when the Seneca Townsite was platted in 1930. I accept the position of this monument for the SW cor. Sec. 35 and although I could see no marks on the stone I found, I believe it to be the original corner stone.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

In place of the concrete filled steel pipe, I set a 1½"x30" galvanized iron pipe 28" in the ground with brass cap marked as shown, from which I set four REFERENCE MONUMENTS:

A 5/8"x30" iron pin bears N. 45° 16' E., 20.00 feet
A 5/8"x30" iron pin bears S. 44° 44' E., 20.00 feet
A 5/8"x30" iron pin bears S. 45° 16' W., 20.00 feet
A 5/8"x30" iron pin bears N. 44° 44' W., 20.00 feet.

All reference monuments have a yellow plastic cap driven over the top of the pin and are marked "B-G-A SURVEY MARKER". All pins are driven flush with the ground.

I buried the corner stone at the base of the iron pipe and buried the steel casing East and alongside the iron pipe.

I set a 5 ft. steel fence post 2½ ft. South of the iron pipe and attached a Grant County BT tag to it.

Bearings are based on solar observation.

MONUMENT MARKED

