


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1880 by Bamford Robb
under General Land Office contract #357
Surveyor General record states;

Set post for $\frac{1}{4}$ sec. cor. from which;

A Pine 10 ins. diam. bears N15E, $3\frac{1}{4}$ lks
A Pine 18 ins. diam. bears N80W, $3\frac{1}{4}$ lks.

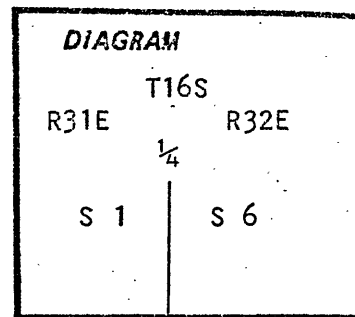

No record of subsequent remonumentation found in County records

Description of corner evidence found:

Found Northeast BT

NW BT is in road cut area

See map of survey dated October, 1981

Description of monument and accessories I established to perpetuate the original location of this corner:

At record bearing and distance from original BT, I set a $2\frac{1}{2}$ x 30 inch aluminum pipe with aluminum cap marked as shown 22 inches in the ground from which;




ORIGINAL BT

A 14 inch P.Pine bears N15E, 22.4 feet, live and vigorous, scribes visible

NEW BT

A 12 inch red fir bears S2W, 30.8 feet, marked $\frac{1}{4}$ S1 BT

Raised mound of small stones

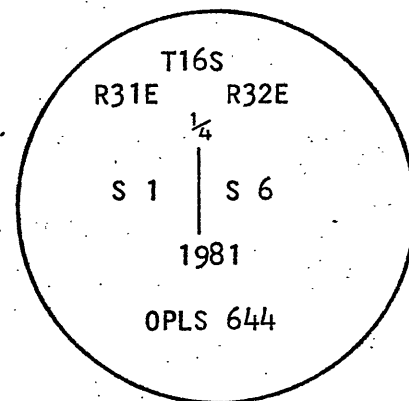

Date October 6, 1981.

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination in the establishment of accessories. Original BTs measured to face of blaze. New BTs measured to center of tree.

Office of Survey County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 23 day of Dec, 1981.
Robert D. Grogan by _____
(COUNTY OFFICIAL) (DEPUTY)