


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Henry W. Cooke
under GL0 contract number 494

Surveyor General record states;

Set post for cor to secs 1, 12, 6 and 7 with
pits and mound as per instructions



Description of corner evidence found:

Found scribed post, loose, leaning against Juniper tree (new Southwest bearing tree) 13 feet Westerly of the proportionate position.
I feel that the post is disturbed from its original position. I therefore establish the corner by proportion.

Description of monument and accessories I established to perpetuate the original location of this corner:



At proportionate distance, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 27 inches in the ground, from which;

A 20 inch diameter P. Pine bears North 53° East, 115.2 feet,
marked T16S R32E S6 BT


A 15 inch diameter Juniper bears South 74° East, 32.0 feet,
marked T16S R32E S7 BT

A 12 inch diameter Juniper bears South 81° West, 13.0 feet,
marked T16S R31E S12 BT

A 18 inch diameter double bole P. Pine bears
North 18° West, 224.1 feet, marked T16S R31E, S1 BT

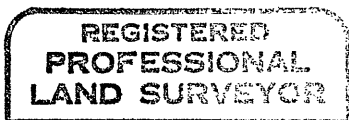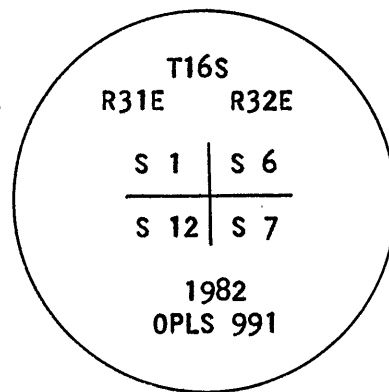

Gregory T. Blackman

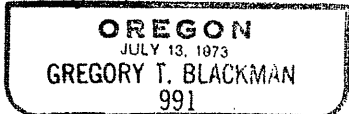

I used a steel tape and magnetic compass with 20° East declination in the establishment of these accessories. I set a brass washer stamped OPLS 991 by the BT blaze Monument was set on May 19, 1982

Office of..... *Surveyor* County of..... *Grant*
State of..... *Oregon* I hereby certify that the within instrument was filed in this office
for record on the..... *8* day of..... *June* , 19..... *82*
Robert D. Baggett by
(COUNTY OFFICIAL) (DEPUTY)