


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Henry W. Cooke
under GLO contract number 494

Surveyor General record states;

Set post for cor to secs 12, 13, 7 and 18
with pits and mound as per instructions



Description of corner evidence found:

NONE



Description of monument and accessories I established to perpetuate the
original location of this corner:

At proportionate distance, I set a 2½" x 30" aluminum pipe with aluminum
cap marked as shown, 27 inches in the ground, from which;


A 1 inch x 5 foot steel fence post 20 inches in the ground
bears South 5.00 feet

A 1 inch x 5 foot steel fence post 20 inches in the ground
bears East 5.00 feet

A fence corner (fences running North and East)
bears North 24° West, 25 feet

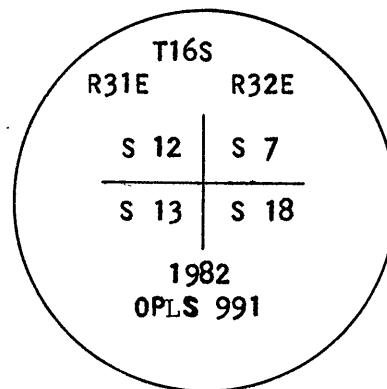

Gregory T. Blackman



I used a steel tape and magnetic compass
with 20° East declination in the establishment
of these accessories.

Monument was set on May 19, 1982

Office of *Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office
for record on the *June* day of *June*, 19*82*
Robert L. Breyer by _____
(COUNTY OFFICIAL) (DEPUTY)