


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by Henry W. Cooke under contract number 494 dated January 16, 1884.

Page 17 of the government field notes state:

4005 Set a basalt stone 16 x 16 x 10 ins 11 ins in ground for 1/4 sec cor marked 1/4 on N face from which
A pine 30 ins dia bears N68°W 26 lks dist marked 1/4S BT
A pine 36 ins dia bears S70°W 34 lks dist marked 1/4S BT

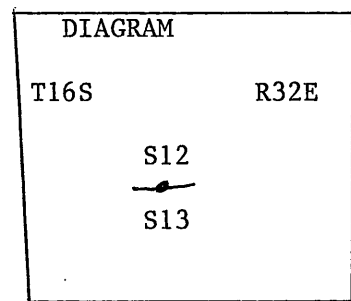

No record of subsequent remonumentation found in county records.

Description of corner evidence found:

A stone 16" x 16" x 9" marked 1/4 on N face.
from which:
A 25" DBH PP bears N66°W 26 lks. scribed 1/4S BT.
A 27" DBH PP " S67°W 34 lks. " 1/4S BT.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 30" long 2-1/2" dia. iron pipe 24" in ground with brass cap marked:
& raised a mound of stones around it.
I buried the original stone monument 2" below ground on the N side of the new monument.

T16S R32E

S12
1/4 —●—
S13
1979
OPLS 1805

Painted faces & bands around BT's red & attached BT & Attention tags.
Drove a 6 Ft. long steel fence post 1-1/2 Ft. in ground 6 Ft. north of corner & attached an attention tag to it.
This corner was set August 28, 1979.
Witness: F.R. Palmer, S. Anderson & L.R. Nevill



Office of _____ County Surveyor _____ County of _____ Grant _____
State of _____ Oregon _____, I hereby certify that the within instrument was filed
in this office for record on the 5 day of Dec, 1979
Robert D. Barger by _____
(COUNTY OFFICIAL) (DEPUTY)