


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by Henry W. Cooke under Contract Number 470 dated April 14, 1883.

The Government Field Notes state:

"40.00 Set a basalt stone 14x12x7 ins. 9" in the ground for $\frac{1}{4}$ Sec cor marked $\frac{1}{4}$ on W face from which
A pine 12 ins. diam bears N 10° E 49 lks dist marked 1/4 S BT
A pine 8 ins. diam bears N 30° W 62 lks dist marked 1/4 S BT. ascend gradually."



No record of subsequent remonumentation was found in County records.

Description of corner evidence found:

Found a 15"x17"x7" basalt stone, no markings visible (weathered).

Found approximately 15" Ponderosa pine blowdown (stump still in place), scribed "1/4 S" N 12° E 33.0 ft to center of stump.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 2½" brass cap on a 2"x30" galvanized iron pipe, 22" in the ground. I buried the stone upside-down to the South of the new monument.

I scribe NEW BEARING TREES

A 9" Lodgepole Pine bears N 87° E 14.4 ft scribed 1/4 S18 BT
A 11" Lodgepole Pine bears N 74° W 38.7 ft scribed 1/4 S13 BT



I painted faces and bands around new BTs and nailed an aluminum washer marked PLS 1918 to the new BT blaze, and attached BT and Attention tags to all BTs. I set a 5' steel fence post North 6 ft with an Attention tag.

I used a steel tape and compass with magnetic variation of 20° East, and measured to the center of new BTs.

This corner was set September 26, 1980.

Witness: Anthony Thomson

MSS INC.
2720 N.W. GLENWOOD DRIVE
CORVALLIS, OREGON 97330

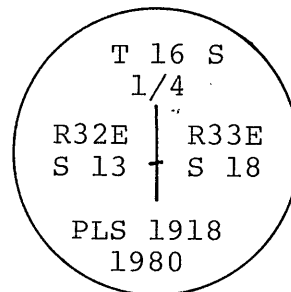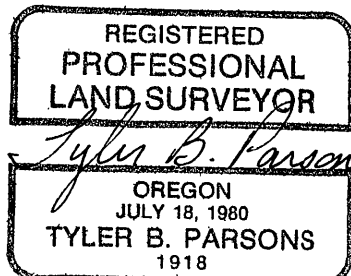

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 25 day of Nov, 1980
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)