


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by S. W. Lackland under contract number 384 dated March 29, 1881.

Page 5 of the government field notes state:

40.00 Set stone 15 x 8 x 5 in mound of stone for 1/4 sec cor from which
A pine 24 in dia. bears N26°W 35 lks. dist

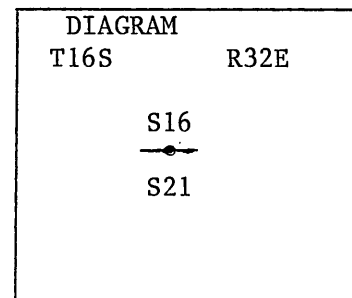

No record of subsequent remonumentation found in county records.

Description of corner evidence found:

A stone 15" x 6" x 2" marked 1/4 from which:

An approx. 36" DBH PP windfall bears N26°W 35 lks. scribed 1/4S BT.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 30" long 2-1/2" dia. aluminum pipe with 3-1/4" cap marked:

25" in ground & erected a mound of stones around it. I buried the original stone monument 2" below ground on the N side of the new monument face down, top to North. from which I scribe NEW BEARING TREES:

A 10" DBH PP bears S68°E 21.1 Ft., scribed 1/4 S21 BT.

A 10" DBH PP bears N21°E 24⁸ Ft., scribed 1/4 S16 BT.

U.S. DEPT.
OF AGRICULTURE
UNLAWFUL TO DISTURB

1/4
T16S
R32E
S16
—●—
S21
OPLS 1805
1979

CADASTRAL SURVEY
FOREST SERVICE



Painted faces & bands around BT's red & attached BT & Attention tags.
Drove a 6 Ft. long steel fence post 3 Ft. in ground 6 Ft. North of corner & attached an attention tag to it.
Used steel tape & magnetic staff compass with 20° East variation, measuring to the center of the new BT's.
This corner was set September 6, 1979.
Witness: F.R. Palmer & L.R. Nevill

Office of _____ County Surveyor _____ County of _____ Grant _____
State of Oregon, I hereby certify that the within instrument was filed
in this office for record on the 5 day of Dec, 1979
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)