


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by Henry W. Cooke under contract number 494 dated January 16, 1884.

Page 32 & 33 of the government field notes state:

- 80.00 Set a basalt stone 16 x 16 x 12 ins 11 ins in ground for cor to secs 14, 15, 22 & 23 marked with 3 notches on S. and 2 notches on E edges from which
- A pine 48 ins dia bears N27°E 81 lks dist marked T16S R32E S14 BT
  - A pine 36 ins dia bears S18°E 86 lks dist marked T16S R32E S23 BT
  - A pine 40 ins dia bears S48°W 104 lks dist marked T16S R32E S22 BT
  - A pine 14 ins dia bears N55°W 117 lks dist marked T16S R32E S15 BT



No record of subsequent remonumentation found in county records.

Description of corner evidence found:

A stone 18" x 18" x 11" with 3 notches S & 2 notches E from which:

- A 35" DBH PP snag bears N28°E 81 lks. scribed T16S R32E S14 BT.
- A 34" DBH PP bears S19°E 86 lks scribed R32E S2.
- A 32" DBH PP snag bears S52°W 104 lks. scribed T16S R32E S22 BT.


No evidence of 4th BT found.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 30" long 2-1/2" dia. aluminum pipe with 3-1/4" aluminum cap marked: 14" in ground & erected a stone mound around it. I buried the original stone monument flush with the ground on the north side of the new monument. from which I scribe NEW BEARING TREES:

- A 16" DBH double juniper bears N9-1/2°W 11.1 Ft., scribed T16S R32E S15 BT.
- An 11" DBH PP bears N87°E 17.5 Ft., scribed T16S R32E S14 BT.
- A 6" DBH juniper bears S66°W 59.1 Ft., scribed T16S R32E S22 Bt.

U.S. DEPT.  
OF AGRICULTURE  
UNLAWFUL TO DISTURB  
T16S  
R32E  
  
S15    S14  
S22    S23  
OPLS 1805  
1979  
CADASTRAL SURVEY  
FOREST SERVICE

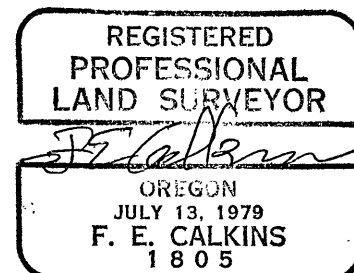

Painted faces & bands around BT's red & attached BT & Attention tags.  
Drove a 6 Ft. long steel fence post 1.5 Ft. in ground 6 Ft. north of corner & attached an attention tag to it.  
Used steel tape & magnetic staff compass with 20° East variation, measuring to the center of the new BT's.  
This corner was set August 29, 1979.  
Witness: F.R. Palmer, S. Anderson & L.R. Nevill

Office of County Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 5 day of Dec, 19 79  
Robert D. Bayne by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)