


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by Henry W. Cooke under contract number 494 dated January 16, 1884.

Page 34 of the government field notes state:

4003 Set a basalt stone 16 x 14 x 10 ins 11 ins in ground for 1/4 sec cor marked 1/4 on N face from which
A pine 18 ins dia bears N85°E 62 lks dist marked 1/4S BT
A pine 36 ins dia bears S10°E 21 lks dist marked 1/4S BT



No record of subsequent remonumentation found in county records.

Description of corner evidence found:

A stone 17" x 11" x 9" marked 1/4 on N face from which:

A 28" DBH PP windfall bears S10°E 21 lks. scribed 1/4S BT.


No evidence of other BT.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 30" long 2-1/2" dia. aluminum pipe with 3-1/4" top marked: 19" in ground & raised a mound of stones around it. I buried the original stone monument face down top to N on the N side of the new monument.

from which I scribe NEW BEARING TREES: 1/4
An 8" DBH PP bears S50°W 40.2 Ft., scribed 1/4S 23 BT.
An 11" DBH PP bears N48°W 44.2 Ft., scribed 1/4S 14 BT.

U.S. DEPT.
OF AGRICULTURE
UNLAWFUL TO DISTURB
T16S
R32E
S14
S23
OPLS 1805
1979
CADASTRAL SURVEY
FOREST SERVICE

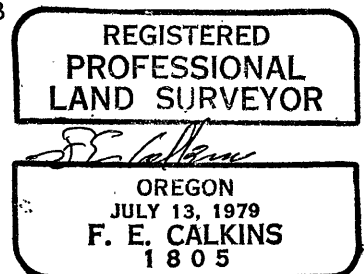

Painted faces & bands around BT's red & attached BT & Attention tags.
Drove a 6 Ft. iron fence post 1.5 Ft. in ground 6 Ft. N of corner & attached an attention tag to it.
Used steel tape & magnetic staff compass with 20° East variation, measuring to the center of the new BT's.
This corner was set August 29, 1979.
Witness: F.R. Palmer, S. Anderson & L.R. Nevill

Office of County Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed
in this office for record on the 5 day of Dec, 1979
Robert D. Baynes by (DEPUTY)
(COUNTY OFFICIAL)