


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by Henry W. Cooke under Contract Number 494 dated January 16, 1884.

The Government Field Notes state:

"4005 Set a post $3\frac{1}{2}$ ft long 3 ins square with marked stone 12 ins in ground for $\frac{1}{4}$ sec cor marked $\frac{1}{4}$ S on W face dug pits 18x18x12 ins N&S of cor $5\frac{1}{2}$ ft dist and raised a mound of earth 2 ft high $3\frac{1}{2}$ ft base around post."

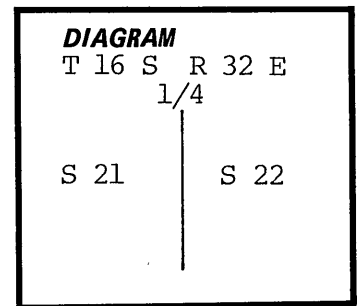

No record of subsequent remonumentation was found in County records.

Description of corner evidence found:

None

*Superseded by monumentation
sheet filed by Parsons
11-29-82*

Description of monument and accessories | established to perpetuate the

original location of this corner:

Reset by single proportion

Set a $2\frac{1}{2}$ " Brass Cap on a 2"x30" galvanized iron pipe, 24" in the ground.


No BTs or BOs in range.

I set 5' steel fence posts East 6ft and West 6ft with Attention tags.

This corner was set August 21, 1980

Witness: Anthony Thomson

MSS INC.
2720 N.W. GLENWOOD DRIVE
CORVALLIS, OREGON 97330

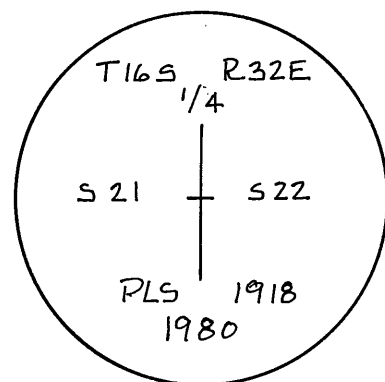

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 14 day of Jan, 1981
Robert D. DeFest by _____
(COUNTY OFFICIAL) (DEPUTY)