


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by Henry W. Cooke under Contract No 494, dated January 16, 1884.

The Government Notes state:

"4005, Set a post $3\frac{1}{2}$ ft long 3 ins square with marked stone 12 ins in ground for $\frac{1}{4}$ sec cor marked $\frac{1}{4}$ S on W face dug pits 18x18x12 ins N&S of corner $5\frac{1}{2}$ ft dist and raised a mound of earth 2 ft high $3\frac{1}{2}$ ft base around post."

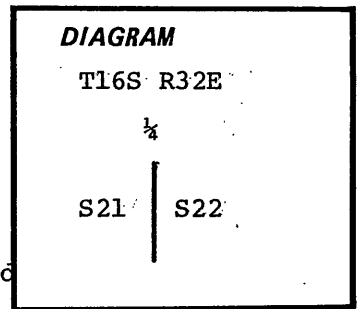

No record of subsequent remonumentation was found in county records.

Description of corner evidence found:

None

Description of monument and accessories | established to perpetuate the original location of this corner:

This corner was reset by single proportion in CS 638 prior to recovery of evidence of the original corner to sections 21, 22, 27 and 28. The monument was removed from the ground and reset by single proportion between the original section corners.

Set a $2\frac{1}{2}$ " brass cap on iron pipe 30" long. Changed the date on the monument.



Bearing trees: None within range.

Set steel fence posts East and West approximately 6 ft and attached Land Survey Monument signs.

This corner was reset in October 1982.

See amendment to CS 638.

MSS INC.
P. O. BOX 1688
CORVALLIS, OR 97339

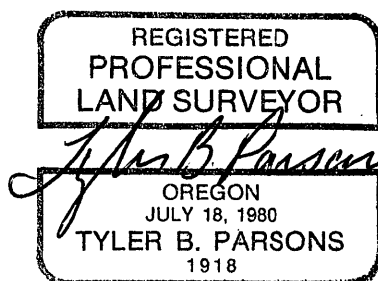

Office of *Surveyor* County of *Grant*
State of *Oregon*, I hereby certify that the within instrument was filed in this office
for record on the *29* day of *Nov*, 19*82*
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)

*This supersedes the corner monumentation sheet
filed by Parsons on Jan. 14, 1981.*

R.D.B.