


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by Henry W. Cooke under Contract Number 494 dated January 16, 1884.

The Government Field Notes state:

"40.00 Set a post 3½ ft long 3 ins. square, with marked stone 24 ins. in ground for ¼ Sec. cor marked ¼ S on W. face from which
A pine 30 ins dia. bears N 14° E 129 lks dist. marked ¼ S BT.
A pine 38 ins. dia bears N 86° W 173 lks. dist. marked ¼ S BT."



No record of subsequent monumentation found in County records.

Description of corner evidence found:

Post and stone not found.

Found original BT, down in excavated area (not original position) approximately West 130 ft. from steel fence post with BLM location tag. Scribing visible on BT.

Found approximately 24" pine, down and rotted, with BT tag, N 14° E 87 ft from steel fence post.

Proportion of this corner from the northwest corner Sec 22, southwest corner Sec 27, S ¼ cor Sec 22, and the S ¼ cor Sec 24 falls N 60° E 15 feet from the steel fence post. Accepted the 24" pine as an original BT. No other trees within 130 ft of this location.

Description of monument and accessories I established to perpetuate the original location of this corner:

Measured S 14° W 85.14 ft from the approximate location of the original scribe as evidenced by the root system and stump. (Other surveys show that Henry W. Cooke normally measured from the scribe.)

Set a 3¼" aluminum cap on a 2¼"x30" aluminum pipe 26" in the ground and erected a mound of stones around it.

From which I scribe NEW BEARING TREES:

- A 10" Ponderosa Pine bears N 26° E 156.7 ft scribed 1/4 S23 BT
- A 11" Ponderosa Pine bears N 19° W 204.3 ft scribed 1/4 S22 BT



I painted faces and bands around BTs red, attached BT and Attention tags, and nailed an aluminum washer marked PLS 1918 to the new BT blaze. I set a 5' steel fence post North 6 ft and attached an Attention tag.

I used a steel tape and compass with magnet variation 20° East and measured to the center of new BTs.

This corner was set August 19, 1980

Witness: Anthony Thomson

MSS INC.
2720 N.W. GLENWOOD DRIVE
CORVALLIS, OREGON 97330

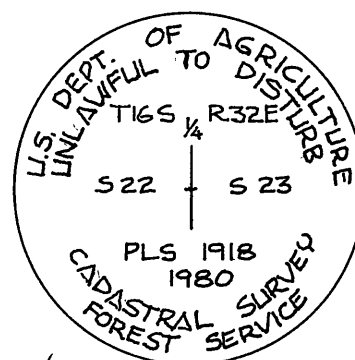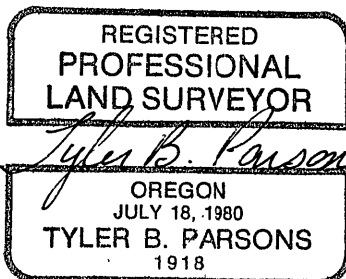

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 25 day of Nov, 1980
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)