


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by Henry W. Cooke under Contract Number 494 dated January 16, 1884.

The Government Field Notes state:

"4000 Set a basalt stone 16x14x14 ins 11 ins in ground for 1/4 sec cor marked 1/4 on W face from which
A pine 16 ins dia bears N65°E 11 lks dist marked 1/4S BT
A pine 28 ins dia bears n71°W 28 lks dist marked 1/4S BT"



No record of subsequent remonumentation was found in County records.

Description of corner evidence found:

None

Description of monument and accessories | established to perpetuate the original location of this corner:

Reset by single proportion
Set a 2½" Brass Cap on a 2"x30" galvanized iron pipe, 18" in the ground, and erected a stone mound around the corner.

I scribe NEW BEARING TREES



A 8" Ponderosa pine bears N 73° E 13.3' scribed 1/4 S24 BT
A 9" Ponderosa pine bears West 52.1' scribed 1/4 S23 BT

I painted faces and bands around new BTs and nailed an aluminum washer marked PLS 1918 to the new BT blaze, and attached BT and Attention tags to all BTs.
I set a 5' steel fence post North 6ft with an Attention tag.

I used a steel tape and compass with magnetic variation of 20° East, and measured to the center of new BTs.

This corner was set August 20, 1980
Witness: Anthony Thomson

MSS INC.
2720 N.W. GLENWOOD DRIVE
CORVALLIS, OREGON 97330

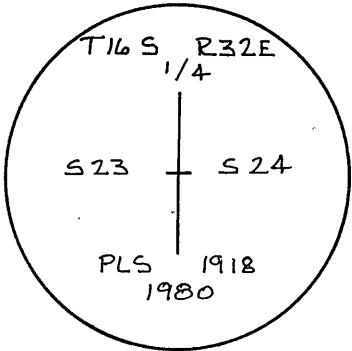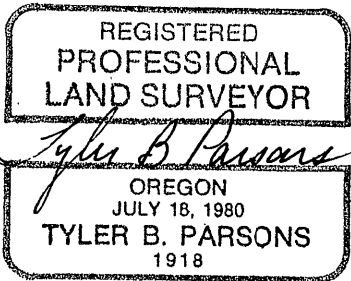

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*14* day of.....*Jan*....., 19..*81*..
.....*Robert D. Baggett*..... by.....
(COUNTY OFFICIAL) (DEPUTY)