

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None, this is a new corner

DIAGRAM

T16S R32E

C-W-SW 1/64

S 24

Description of corner evidence found:

Description of monument and accessories | established to perpetuate the original location of this corner:

Corner position falls in a portion of Bear Creek. I set two Witness Corners along the existing property lines.

Set a 3-1/4" x 28" aluminum monument 20" in the ground in a mound of stone.

The true corner lies S89°52'41"E, 60.00 ft.

No BTs within range.

Set a steel fence post with Attention and Boundary signs West 3 ft.

T16S R32E
C-W-SW 1/64
WC----->60 FT
S24 TO COR
PLS 1918
1984

Set a 3-1/4" x 28" aluminum monument 20" in the ground.

The true corner lies N0°07'28"W, 23.00 ft.

No BTs within range.

Set a steel fence post with Attention and Boundary signs South 3 ft.


T16S R32E
C-W-SW 1/64
^ 23 FT
WC | TO COR
S24
PLS 1918
1984

These corners were set October 18, 1984.

Witnessed by: Louise H. Parsons.

Road Cadastral Survey, Cont. No. 53-04H1-4-9665N.

TYLER B. PARSONS
Professional Land Surveyor
1915 S.E. Stone Street
Corvallis, OR 97333
(503) 752-7515

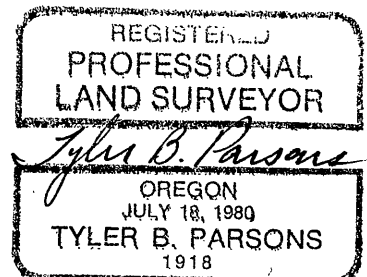

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 20 day of Nov, 1984
Robert D. Seitz by _____
(COUNTY OFFICIAL) (DEPUTY)