


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by Henry W. Cooke under Contract Number 494 dated January 16, 1884.

The Government Field Notes state:

"4005 Set a post 3½ ft long 3 ins square with marked stone 12 ins in ground for 1/4 sec cor marked 1/4S on N face dug pits 18x18x12 ins E&W of cor 5½ ft dist and raised a mound of earth 2 ft high 3 ft base around post."



No record of subsequent remonumentation was found in County Records.

Description of corner evidence found:

None

Description of monument and accessories I established to perpetuate the

original location of this corner:

Reset by single proportion

Set a 2½" Brass Cap on a 2"x30" galvanized iron pipe, 22" in the ground.


No BTs or BOs in range.

I set 5' steel fence posts South 6ft and North 6ft with Attention tags.

This corner was set August 20, 1980

Witness: Anthony Thomson

MSS INC.
2720 N.W. GLENWOOD DRIVE
CORVALLIS, OREGON 97330

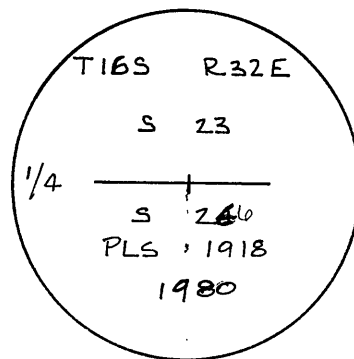

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*14*..... day of.....*Jan*....., 19*81*.
.....*Robert D. Sage*..... by.....
(COUNTY OFFICIAL) (DEPUTY)