


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by Henry W. Cooke under Contract Number 494 dated January 16, 1884.

The Government Field Notes state:

"8000 Set a post 4½ ft long 4 ins square with marked stone 12 ins in ground for cor to secs 23,24,25&26 marked T16S S24 on NE, R32E S25 on SE, S26 on SW, and S23 on NW faces with 2 notches on S. and 1 notch on E edges dug pits 18x18x12 ins in each sec 5½ ft dist and raised a mound 2½ ft high 4½ ft base around post."

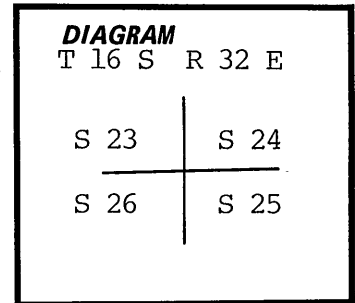

No record of subsequent remonumentation was found in County records.

Description of corner evidence found:

None

Description of monument and accessories | established to perpetuate the original location of this corner:

Reset by double proportion

Set a 2½" Brass Cap on a 2"x30" galvanized iron pipe, 24" in the ground.

I scribe NEW BEARING TREE

A 16" Ponderosa pine bears S 82° E 216.6' scribed T16S R 32 E S25 BT
No other suitable BTs or BOs in range.



I painted the face and a band around the new BT and nailed an aluminum washer marked PLS 1918 to the new BT blaze, and attached an Attention and BT tag to the new BT. I set 5' steel fence posts South 6ft and East 6ft with Attention tags.

I used a steel tape and compass with magnetic variation of 20° East, and measured to the center of the new BT.

This corner was set August 20, 1980

Witness: Anthony Thomson

MSS INC.
2720 N.W. GLENWOOD DRIVE
CORVALLIS, OREGON 97330

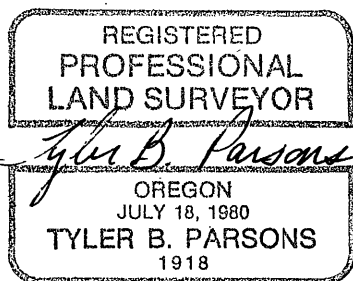

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*14* day of.....*Jan*....., 19*81*.
Robert D. Baggett by.....
(COUNTY OFFICIAL) (DEPUTY)