

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner set by Henry W. Cooke under contract number 494 dated January 16, 1884.

Page 9 of the government field notes state:

4007 Set a post 3-1/2 ft long 3 ins square with marked stone 24 ins in ground for 1/4 sec cor marked 1/4 S on N face from which

A pine 14 ins dia bears N60°E 18 lks dist marked 1/4S BT

A pine 30 ins dia bears S24°W 54 lks dist marked 1/4S BT

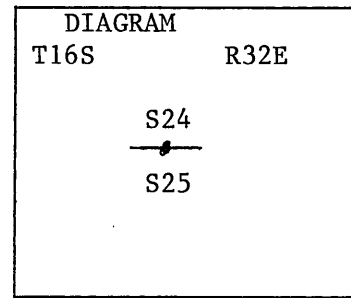

No record of subsequent remonumentation found in county records.

Description of corner evidence found:

No evidence of original corner post or marked stone as corner position falls inside clearing limits of a road.

I re-establish the corner position measuring from the face of the only remaining bearing tree. From the corner point:

A 27" DBH PP bears S24°W 54 lks. scribed 1/4S BT.

Description of monument and accessories I established to perpetuate the original location of this corner:


Set a 30" long 2-1/2" dia. aluminum pipe with 3-1/4" cap marked: 22" in ground & erected a mound of stones around it flush with the top of the cap.

from which I scribe NEW BEARING TREES:

A 9" DBH LPP bears N13-1/2°W 43.7 Ft., scribed 1/4 S24 BT.

A 9" DBH LPP bears S46°E 29.7 Ft., scribed 1/4 S25 BT.

U.S. DEPT.
OF AGRICULTURE
UNLAWFUL TO DISTURB
T16S
R32E
S24
S25
OPLS 1805
1979
CADASTRAL SURVEY
FOREST SERVICE



Painted faces & bands around BT's red & attached BT & Attention tags. Drove a 6 Ft. long iron fence post 2-1/2 Ft. in ground 6 Ft. south of corner & attached an attention tag to it.

Used steel tape & magnetic staff compass with 20° East variation, measuring to the center of the new BT's.

This corner was set August 29, 1979.

Witness: F.R. Palmer, S. Anderson & L.R. Nevill

Office of _____ County Surveyor _____ County of _____ Grant _____
State of Oregon, I hereby certify that the within instrument was filed
in this office for record on the 5 day of Dec, 1979
Robert D. Bayart by _____
(COUNTY OFFICIAL) (DEPUTY)