


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by Henry W. Cooke under Contract Number 494 dated January 16, 1884.

The Government Field Notes state:

"4000 Set a basalt stone 18x16x10 ins 12 ins in ground for 1/4 sec cor marked 1/4 on W face from which
A pine 38 ins dia bears S10°E 140 lks dist marked 1/4SBT
A pine 40 ins dia bears S40°W 146 lks dist marked 1/4SBT"



No record of subsequent remonumentation was found in County records.

Description of corner evidence found:

None

Description of monument and accessories I established to perpetuate the original location of this corner:

Reset by single proportion

Set a 2½" Brass Cap on a 2"x30" galvanized iron pipe, 22" in the ground and erected a stone mound around the corner.

I scribe NEW BEARING TREES

A 14" Ponderosa pine bears S 58° E 148.2' scribed 1/4 S26 BT
No other suitable BTs or BOs in range.



I painted faces and Band around the new BT, and nailed an aluminum washer marked PLS 1918 to the new BT blaze, and attached BT and Attention tags to the BT.
I set a 5' steel fence post South 6ft with an Attention tag.

I used a steel tape and compass with magnetic variation of 20° East, and measured to the center of the BT.

This corner was set August 26, 1980

Witness: Anthony Thomson

MSS INC.
2720 N.W. GLENWOOD DRIVE
CORVALLIS, OREGON 97330

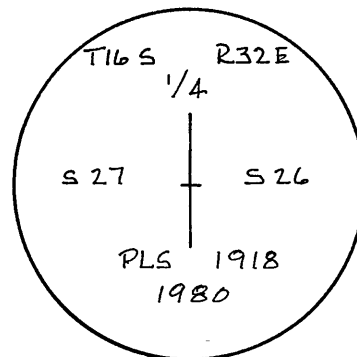

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*14* day of.....*Jan*....., 19*81*
Robert D. Baggett by.....
(COUNTY OFFICIAL) (DEPUTY)