


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by Henry W. Cooke under contract number 494 dated January 16, 1884.

Page 57 of the government field notes state:

8000 Set a basalt stone 16 x 14 x 12 ins 11 ins in ground for cor to secs 28, 29, 32 & 33 marked with 1 notch on S. and 4 notches on E edges from which
 A pine 40 ins dia bears N20°E 51 lks dist marked T16S R32E S28 BT
 A pine 24 ins dia bears S31°E 49 lks dist marked T16S R32E S33 BT
 A pine 36 ins dia bears S30°W 28 lks dist marked T16S R32E S32 BT
 A pine 26 ins dia bears N14°W 26 lks dist marked T16S R32E S29 BT

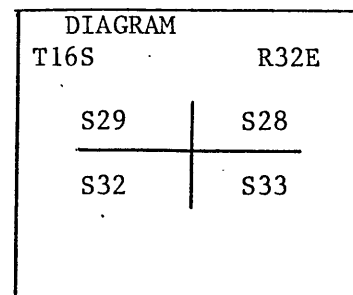

No record of subsequent remonumentation found in county records.

Description of corner evidence found:

A stone 16" x 12" x 9" with 1 notch south and maybe 4 notches east (some pieces of this stone are broken off).
 from which:
 A 22" DBH PP bears S30°E 49 lks. scribed T16S R32E S32.
 A 17" DBH PP stump 3 ft. tall bears N10°W 26 lks. scribed 2E S29 BT.
 A 29" DBH PP stump 4 ft. tall bears N20°E 51 lks. scribed 28 BT.
 A 24" Dia. PP windfall bears S30 W 28° lks. scribed T16S R32E S32 BT.

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 30" long 2-1/2" dia. aluminum pipe with 3-1/4" cap marked:
 18" in ground & erected a mound of stones around it. I buried the original stone monument on the north side of the new monument with the 1 notch down, top to north, flush with ground.
 from which I scribe NEW BEARING TREES:

A 12" DBH PP bears N35°E 28.3 Ft., scribed T16S R32E S28 BT.
 An 8" DBH PP bears S34°W 14.7 Ft., scribed T16S R32E S32 BT.
 An 8-1/2" DBH PP bears N57-1/2°W 12.6 Ft., scribed T16S R32E S29 BT.

U.S. DEPT.
 OF AGRICULTURE
 UNLAWFUL TO DISTURB
 T16S
 R32E

S29	S28
S32	S33

 OPLS 1805
 1979
 CADASTRAL SURVEY
 FOREST SERVICE



Painted faces & bands around BT's red & attached BT & Attention tags.
 Drove a 6 Ft. long steel fence post 1- Ft. in ground 6 Ft. North of corner & attached an attention tag to it.
 Used steel tape & magnetic staff compass with 20° East variation, measuring to the center of the new BT's.
 This corner was set September 13, 1979.
 Witness: F.R. Palmer, S. Anderson & L.R. Nevill

Office of _____ County Surveyor _____ County of _____ Grant _____
 State of _____ Oregon _____, I hereby certify that the within instrument was filed in this office for record on the 18 day of Dec, 1979
Robert D. Baggett by _____
 (COUNTY OFFICIAL) (DEPUTY)