

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not established in original survey

DIAGRAM

C-N 1/16

S 31

T16S R32E

No record of subsequent monumentation found in County records

Description of corner evidence found:

NONE

See survey dated October, 1981

Description of monument and accessories established to perpetuate the original location of this corner:

At corner point I set a 2½ x 30 inch aluminum pipe with aluminum cap marked as shown 29 inches in the ground from which;

NEW BTs


A 8 inch P.Pine bears S55E, 23.5 feet marked CN 1/16 S31 BT

A 12 inch red fir bears S41W, 21.9 feet marked CN 1/16 S31 BT

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert F. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

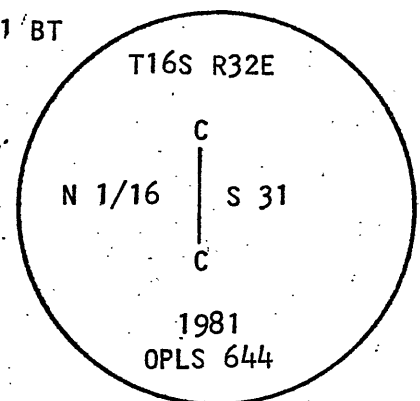

Date. October 8, 1981.

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination in the establishment of accessories. New BTs measured to center of tree.

Office of Sumner County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 23 day of Dec, 1981
Robert F. Griffith by _____
(COUNTY OFFICIAL) (DEPUTY)