


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

16
20

History of original corner establishment:

Corner established in 1880 by Bamford Robb
under General Land Office contract #357
Surveyor General record states;

Set post for 1/4 sec.cor. with pits and mound

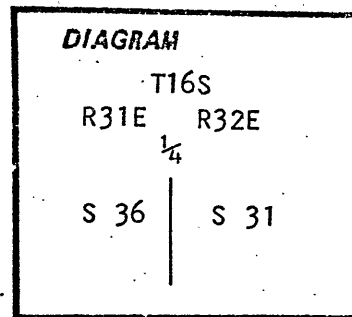

No record of subsequent remonumentation found in County records
Description of corner evidence found:

NONE

See map of survey dated October, 1981


Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set a 2 1/2 x 30 inch aluminum pipe with aluminum cap marked as shown 24 inches in the ground from which;

NEW BTs

A 15 inch P.Pine bears N43E, 246.0 feet, marked 1/4 S31 BT
A 30 inch P.Pine bears N88E, 241.8 feet, marked X BT

Raised mound of stone

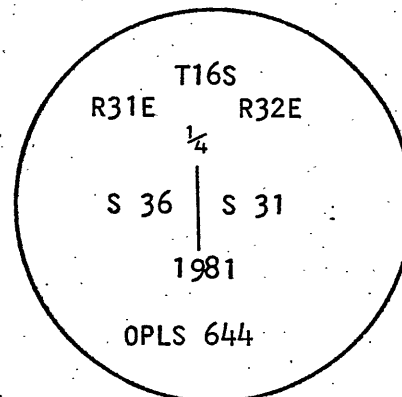

Date, October 9, 1981.

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination in the establishment of accessories. Original BTs measured to face of blaze. New BTs measured to center of tree.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 23 day of Dec, 1981
Robert P. Haggett by _____
(COUNTY OFFICIAL) (DEPUTY)