


CORNER RESTORATION

¼ CORNERS. 31 & S 32 TWP 16S RANGE 32E

ORIGINAL SURVEY BY: Henry W. Cooke

CONTRACT NUMBER: 494

CONTRACT DATE: January 16, 1884

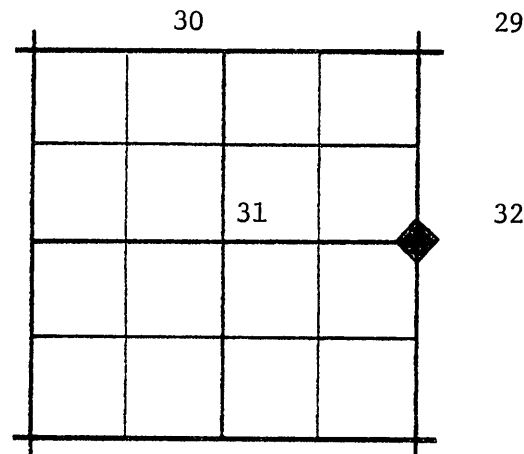

ORIGINAL DESCRIPTION: 40.10 ch. set a basalt stone 18x16x16 ins., 12 ins. in ground for 1/4 sec. cor., marked 1/4 on W face from which a pine 30 ins. dia. bears N 80° W 40 lks. dist. marked ¼ S B.T. A pine 36 ins. dia. bears S 25° E 29 lks. dist. marked ¼ S B.T.

RESTORATION BY, STAMP AND DATE:



December 19, 1969


EVIDENCE FOUND:

Found bearing tree. A pine 36 ins. dia. marked ¼ S B.T. Found bearing tree. A pine 36 ins. dia. marked ¼ S B.T.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var. Established corner location, from intersection of dist. and bearings from bearing trees. Set 2½ ft x 1½ ins. coated pipe with 2" brass cap. Constructed rock mound to top of cap. Marked as shown, from which I set a new bearing tree for Sec. 31. A Douglas-fir 6 ins. dia. bears S 34° W 28.8 ft. dist. marked ¼ S B.T. used original bearing tree for Sec. 32 B.T. Using Leapold Staff Compass with 20° declination set off to east.

MONUMENT MARKED

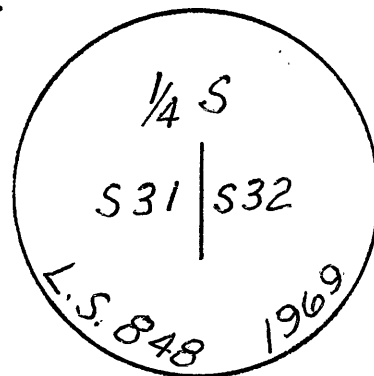

Complete and File with Office of the Grant
County Surveyor, Grant County, Oregon,
Courthouse, Canyon City, Oregon 97820