


CORNER RESTORATION R.31E.

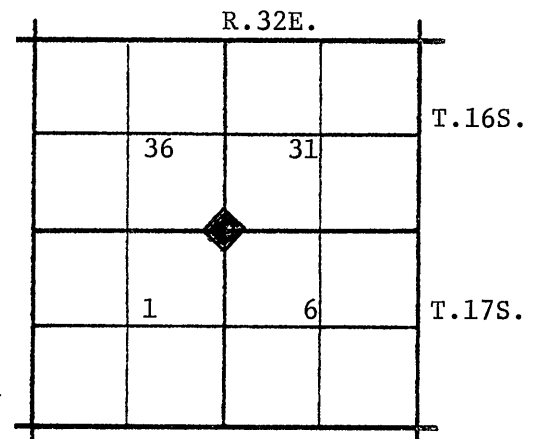

Township CORNER Sec. 36, 31, 1 TWP 16 & 17S RANGE R31 & 32E.
&6

ORIGINAL SURVEY BY: Bradford Robb

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

ORIGINAL DESCRIPTION:

80 ch. Set stone 12x10x8 ins. in mound of stone for cor. to townships 16 and 17S., R.31 and 32E., from which a pine 10 ins. dia. bears S 5° W 28 lks. dist. a pine 24 ins. dia. bears N 15° W 38 lks. dist.

RESTORATION BY, STAMP AND DATE:

REGISTERED
OREGON
LAND SURVEYOR

Douglas M. Ferguson

JULY 12, 1968
DOUGLAS M. FERGUSON
848

November 28, 1969

EVIDENCE FOUND:


Found bearing tree 10" pond. pine which bears S 5° W 28 lks. (18.5 ft.) dist. from a mound of stone with 12x10x8 in stone.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the position of the mound of stone described above, a 2½ ft. x 1½ ft. zinc coated pipe with 2" brass cap is set with a mound of stone constructed to the top of brass cap marked as shown. from which new bearing trees are set. A pond. pine 14 ins. dia. bears N 45° W 88½ ft. dist. marked R.31E., S 36 B.T. A Douglas-fir 20 ins. dia. bears S 35° W, 240 ft. dist. marked T.17S., S 1 B.T. A pond. pine 14 ins. dia. bears S 14° E 38 ft. dist. marked R.32E., S 6 B.T. A pond. pine 14 ins. dia. bears N 14° E 58.2 ft. dist. marked T.16S., S 31 B.T. using Leapold Staff Compass with 20° declination set of to east as checked by solar observation.

MONUMENT MARKED

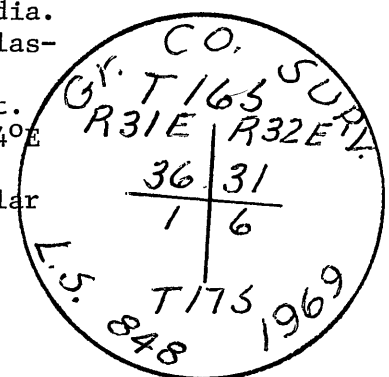

Complete and File with Office of the Grant
County Surveyor, Grant County, Oregon,
Courthouse, Canyon City, Oregon 97820